JST138C-800E 12A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST138C-800E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. From T2 terminals to external heatsink. Package TO-220C is RoHS compliant.

MAIN Fct (AI)iant.

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33	- -	MAX.	10	mA
				25	
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3k	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	25	mA
				35	
I_H	I_T=500mA		MAX.	25	mA
dV/dt	V_D=540V Gate Open T_j=125		MIN.	100	V s
(dV/dt)c	(dI/dt)c=5A/ms, T_j=110		MIN.	5	9 V
t_{on}	I_G=40mA I_A=200mA I_R=20mA T_j=25		TYP.	3	s
t_{off}				30	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=15A t_p=380 s	T_j=25	1.6	V
V_{TO}	Threshold voltage	T_j=125	0.8	V
R_D	Dynamic resistance	T_j=125	41	P
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	A
I_{RRM}		T_j=125	0.5	mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	1.5	/W
$R_{th(j-a)}$	junction to ambient (AC)	60	/W

ORDERING INFORMATION

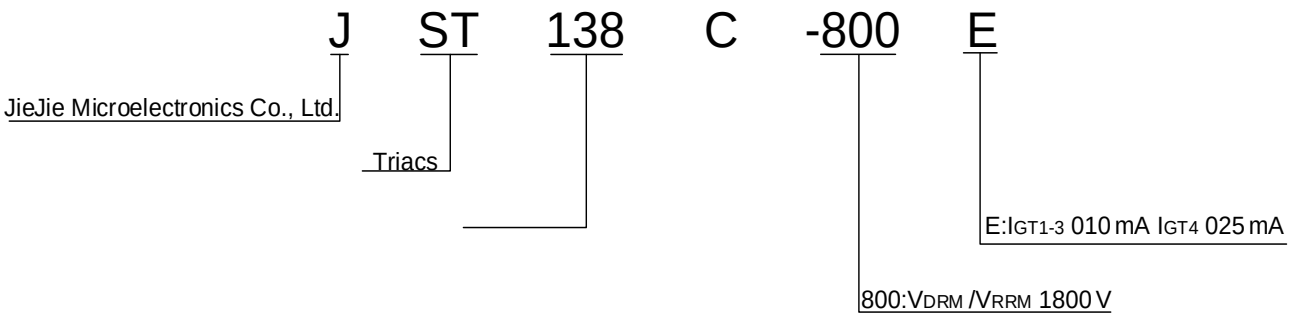


FIG.1: Maximum power dissipation versus RMS on-state current

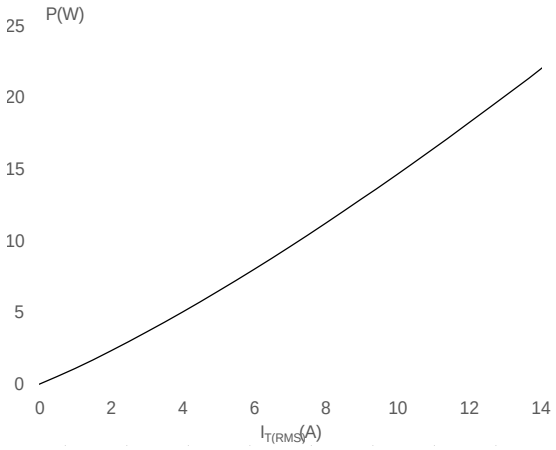


FIG.2: RMS on-state current versus case temperature

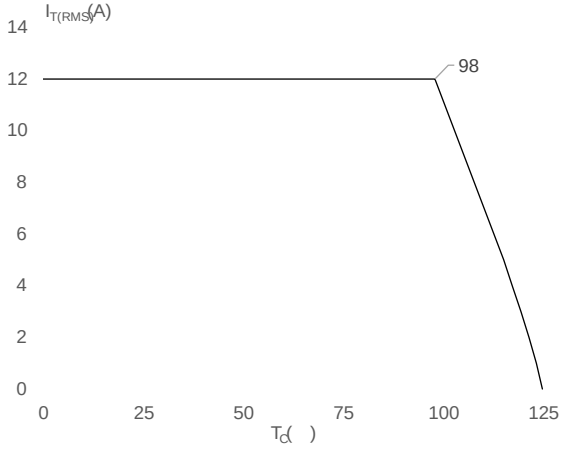


FIG.3: Surge peak on-state current versus number of cycles


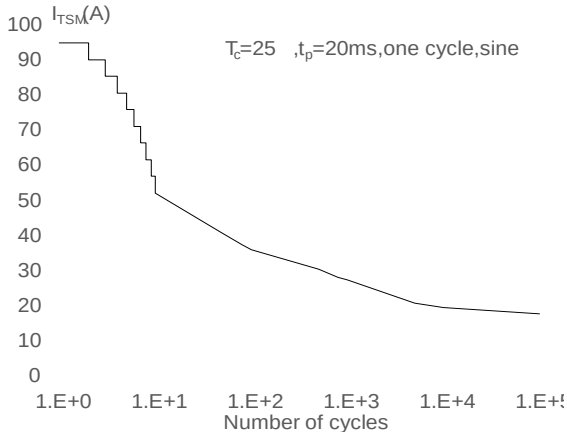


FIG.4: On-state character

FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

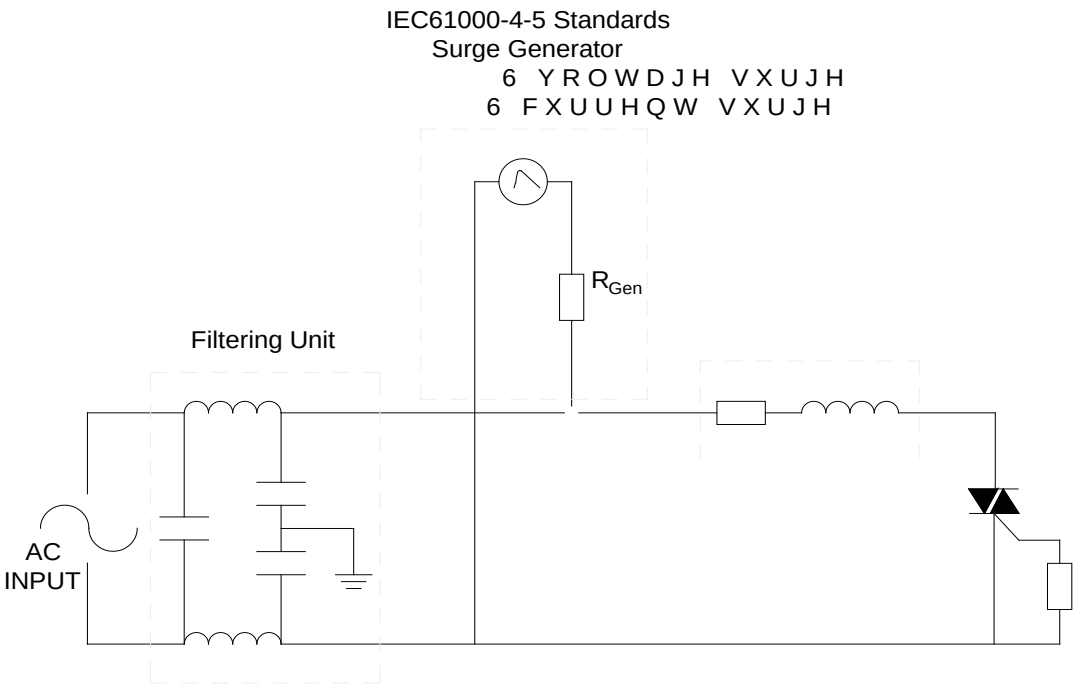

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		- -				
JST138C-800E	800	10	25	TO-220C	50	Tube

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated
Oct.16, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGE MECHANICAL DATA

