ies Rev.A.1.1

to 100

mpliance

M4

UM RATINGS

arameter	Symbol	Value	Unit
[redacted]			

	≥	Δ		

NOTE1:

NOTE2:

ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

JOC306XD4

FIG.7:

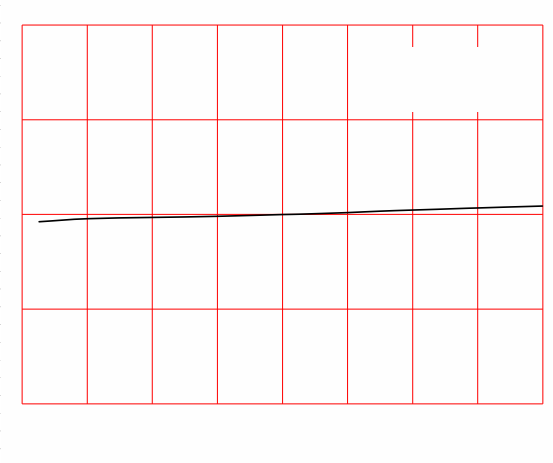


FIG.8:

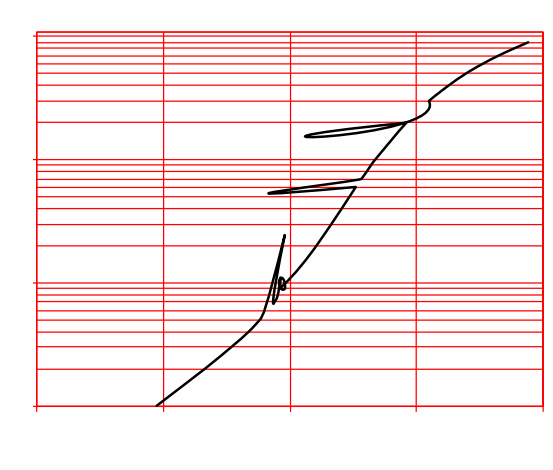


FIG.9:


FIG.10:

TEST CIRCUITS

FIG.12:


FIG.13:

Fig.14: Test Circuits of dV/dt

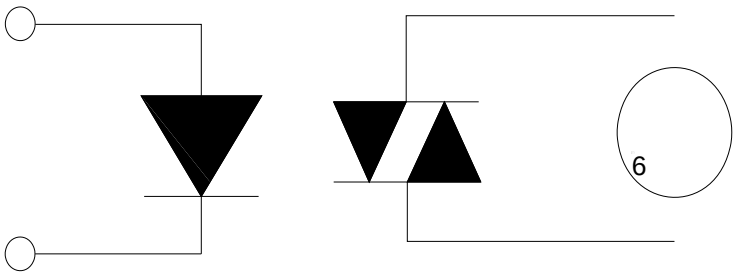


Package Dimension (Unit: mm


Standard DIP Type:

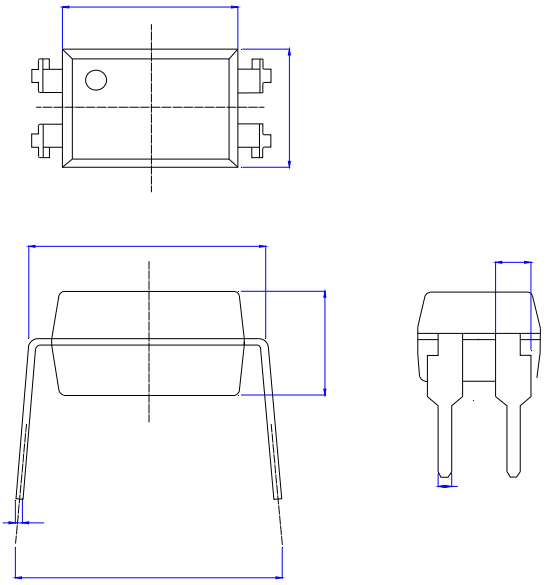


Option S Type:

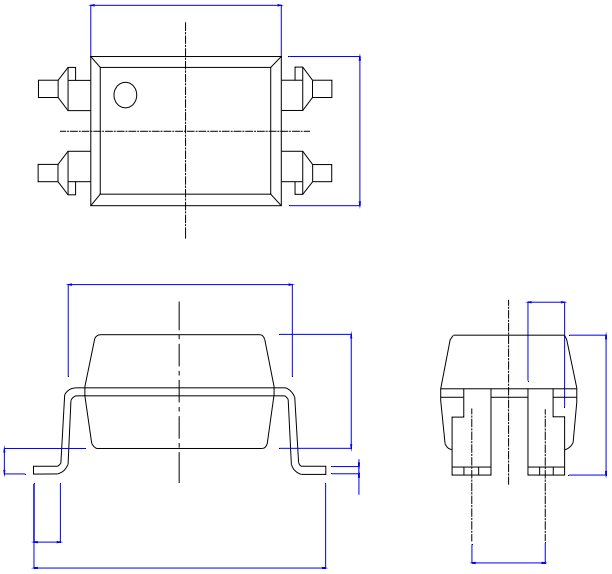

Option SL Type:

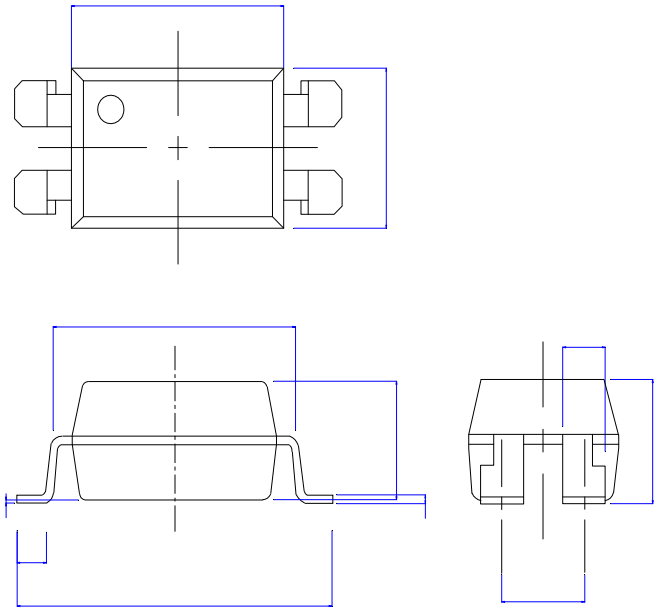

Option SLM Type:

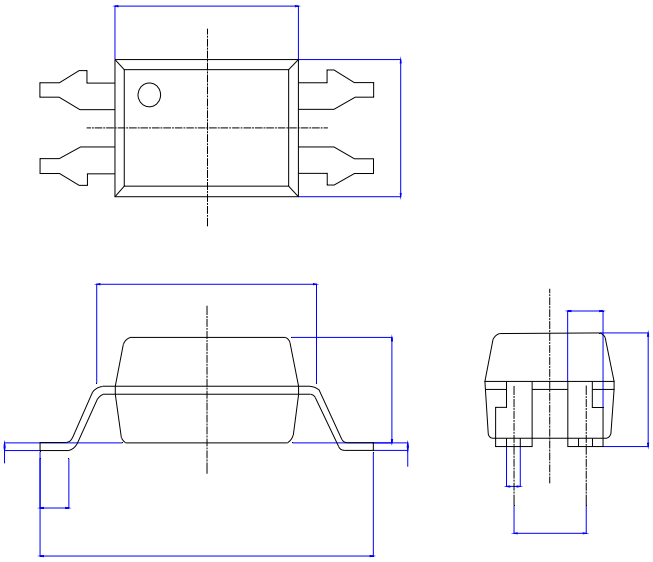


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Option S/SL


TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

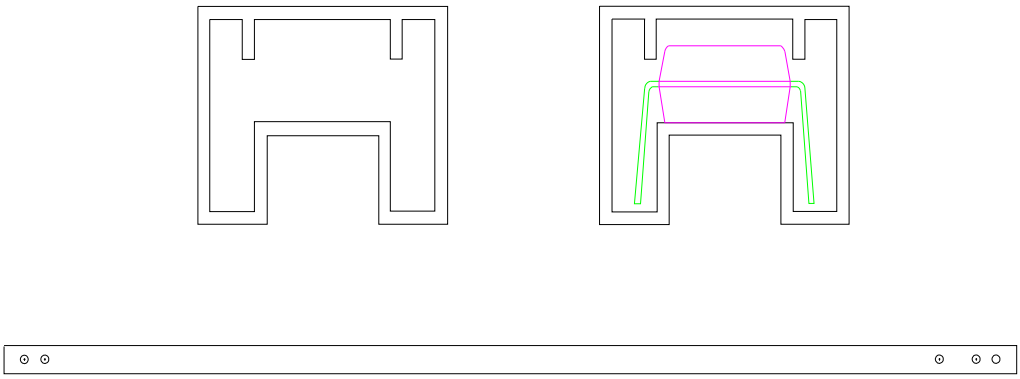

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S

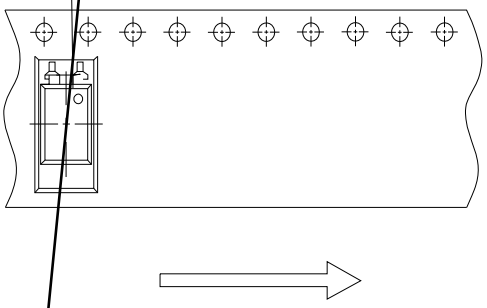


[redacted]

[redacted]

Option S


REFLOW INFORMATION

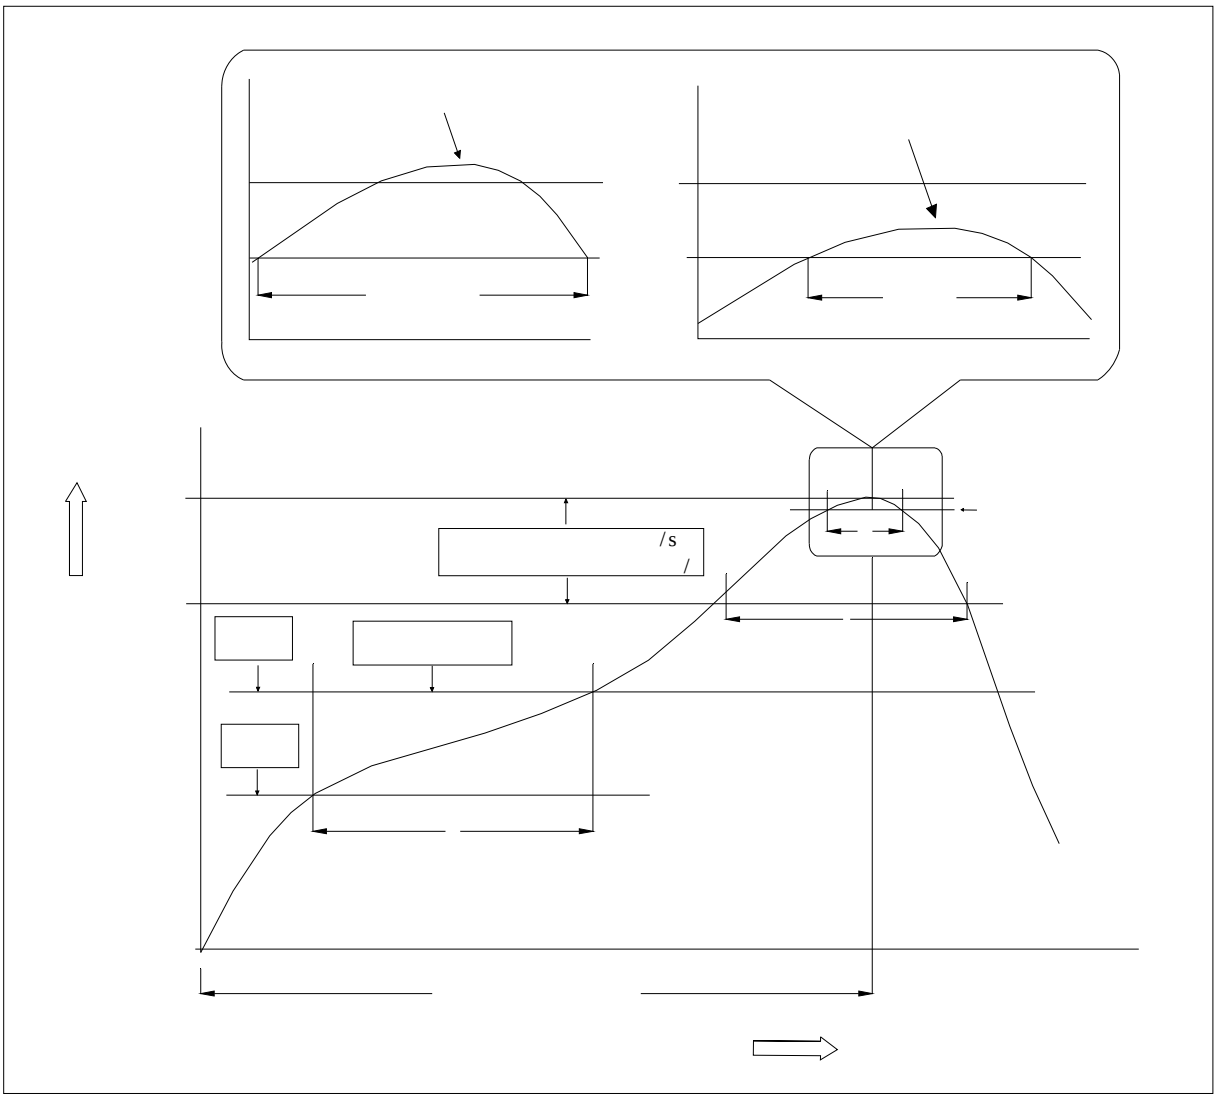

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile

< ž ś Ů

WAVE SOLDERING

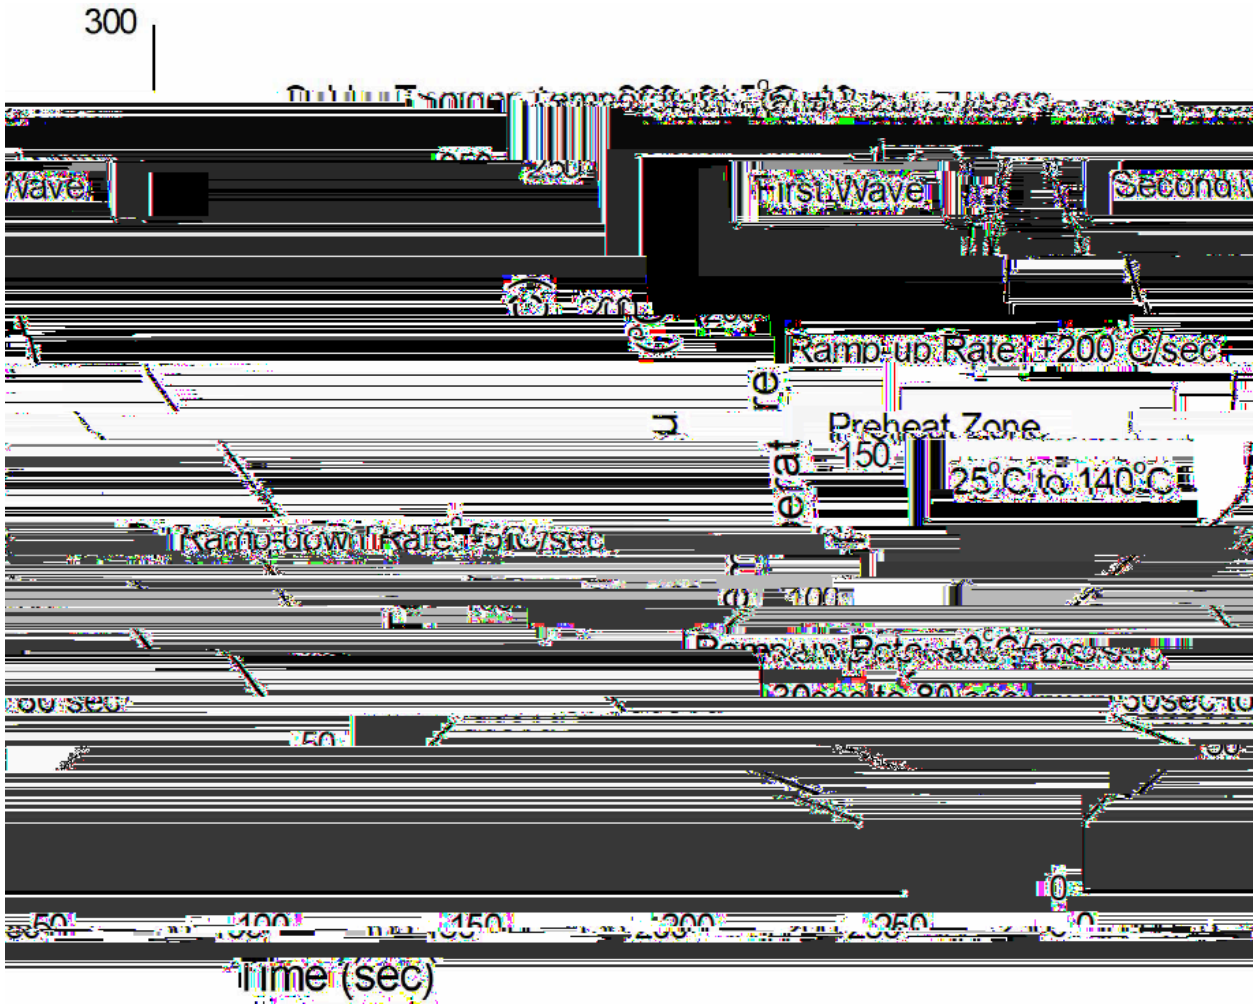

HAND SOLDERING BY SOLDERING IRON	
	±