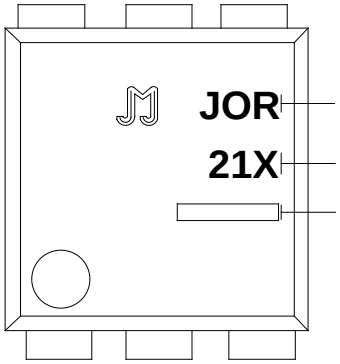
TEL +86-513-68528666 http://www.jjwdz.com


ORDERING AND MARKING INFORMATION

MARKING INFORMATION	
	: Company Abbr. : Part Number & Rank : Production Information Code

Packing Quantity			
Option	Quantity	Quantity – Inner box	Quantity – Outer box
DIP	60 Units/Tube	40 Tubes/Inner box	5 Inner box/Outer box =12k Units
SMD	1200 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box =12k Units


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Option SMD

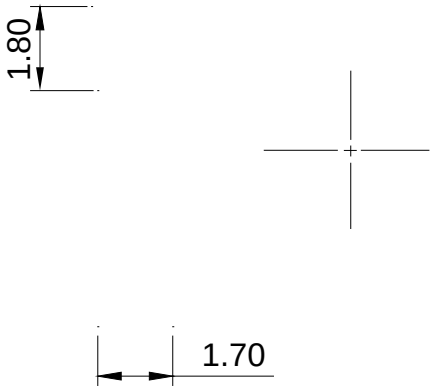


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S

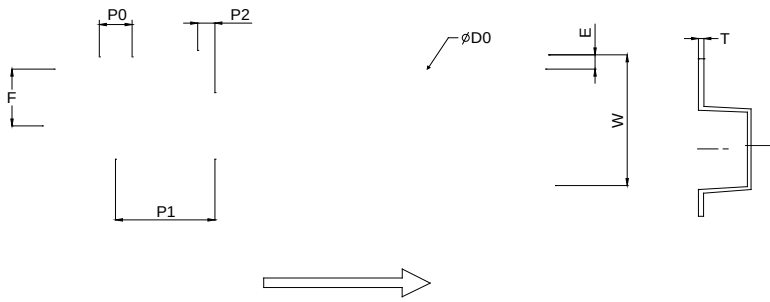


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.70	16.00	16.30	0.618	0.630	0.642

REFLOW INFORMATION

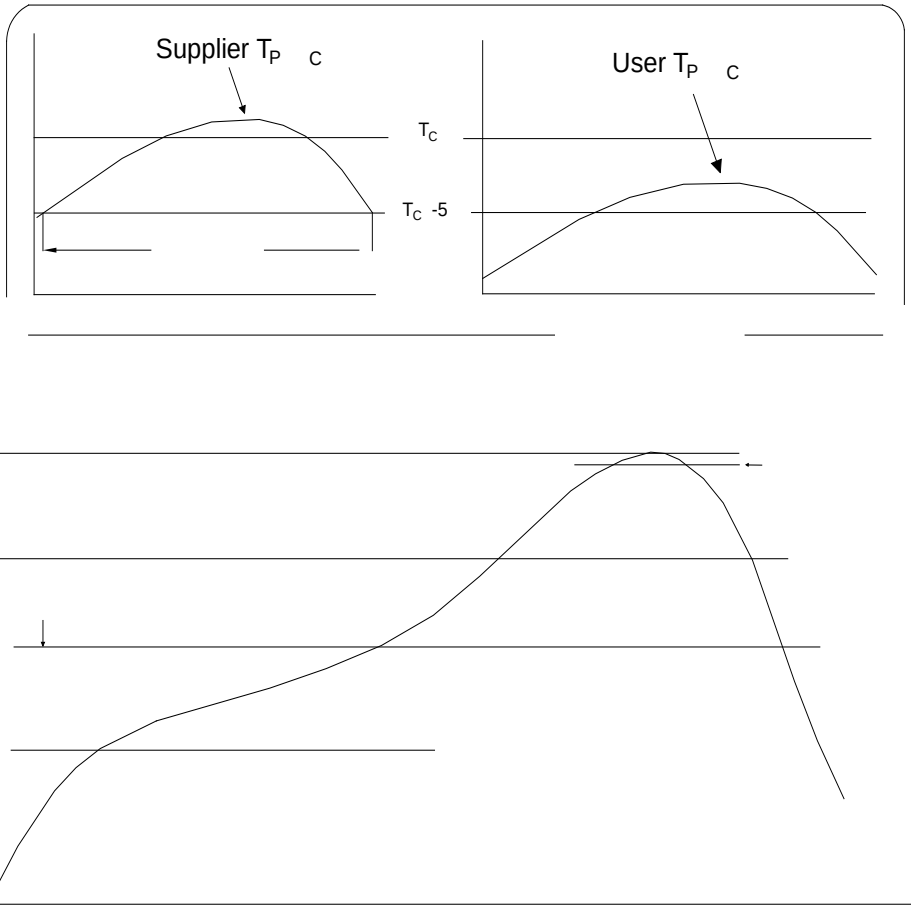

WAVE SOLDERING

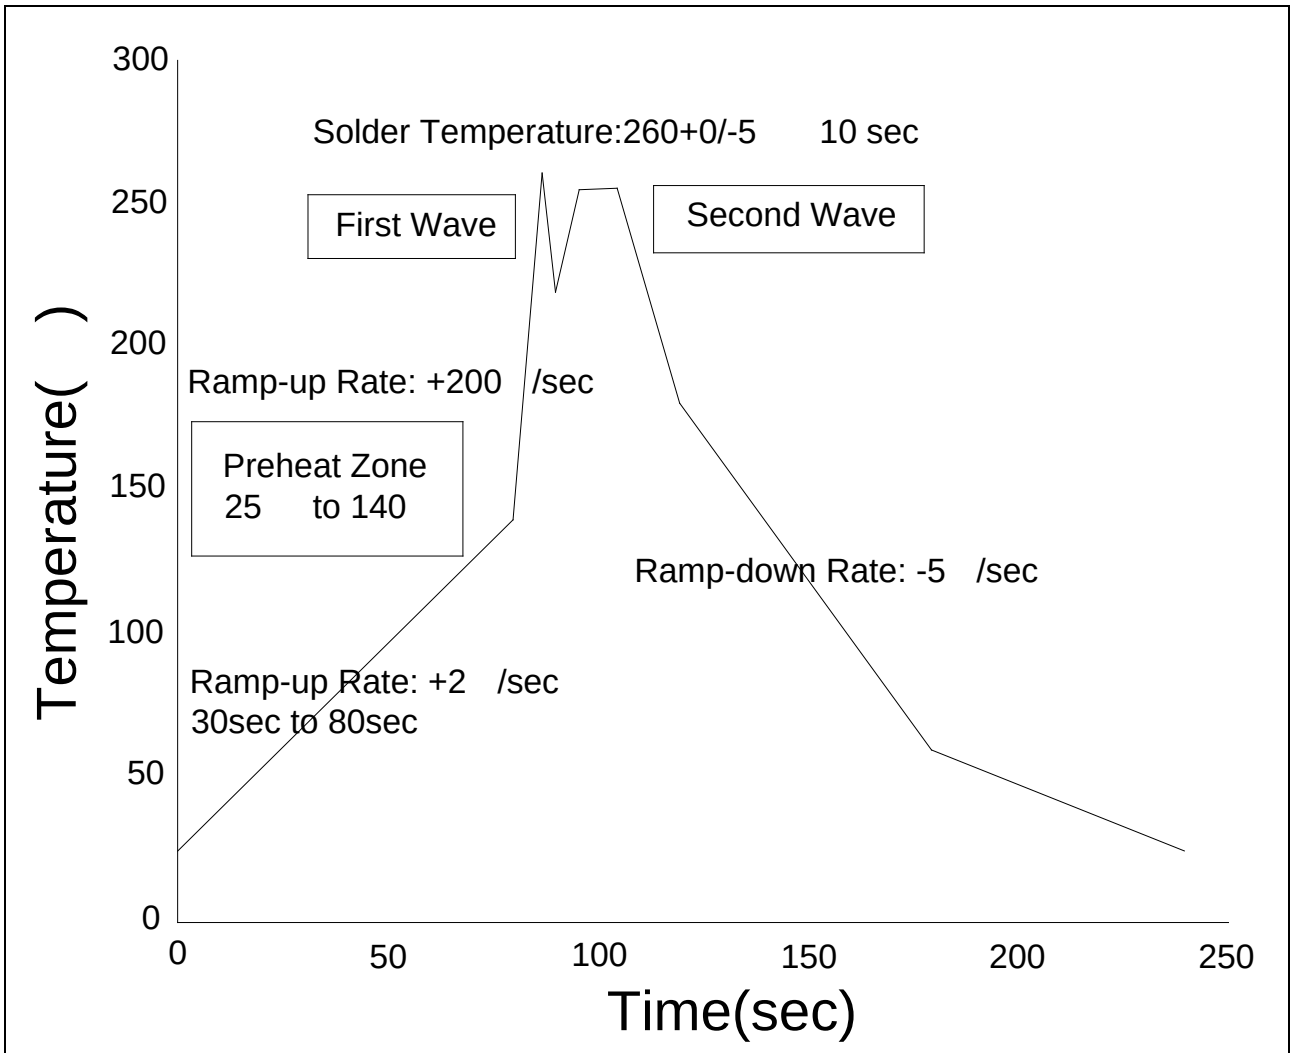

HAND SOLDERING BY SOLDERING IRON	
Soldering Temperature	360± 5
Soldering Time	3s max.

Note:

1. Reflow soldering is recommended at the temperatures and times shown, no more than three times.

2.