All d c i f a i i c igh ed a d bjec legal di clai e .

CES	Collector-emitter voltage	650	V
GES	Gate-emitter voltage	±20	V
C	Continuous collector current (C=25)	12	A
	Continuous collector current (C=100)	6	A
CM	Pulsed collector current, p limited by vjmax	24	A
F	Diode continuous forward current (C=100)	6	A
FM	Diode maximum current, p limited by vjmax	24	A
sc	Short circuit withstand time	10	μs
tot	Power dissipation (C=25)	115	W
	Power dissipation (C=100)	57	W
vj	Operating junction temperature range	-40 to +175	
stg	Storage temperature range	-55 to +150	

th(j-c) Theh

All d c i f a i i c igh ed a d bjec legal di clai e .

. (vj=25 unless otherwise

CES	Collector-emitter breakdown voltage	GE=0V, C=250μA	650	-	-	V
CES	Collector-emitter leakage current	CE=650V, GE=0V	-	-	10	μA
GES	Gate leakage current, forward	GE=20V, CE=0V	-	-	100	nA
	Gate leakage current, reverse	GE=-20V, CE=0V	-	-	-100	nA
GE(th)	Gate-emitter threshold voltage	GE=VCE, C=1mA	5.7	6.2	6.7	V
CE(sat)	Collector-emitter saturation voltage	GE=15V, C=6A	-	1.7	-	V
		GE=15V, C=6A, vj=175	-	2.2	-	V

ies	Input capacitance	CE=30V GE=0V =1MHz	-	480	-	pF
oes	Output capacitance		-	22	-	pF
res	Reverse transfer capacitance		-	8	-	pF
g	Total gate charge	CC=520V GE=15V C=6A	-	19	-	nC

All d c i f ai i c igh ed a d bjec legal di clai e .

Switching characteristics

$t_{d(on)}$	Turn-on delay time	V_{CC}=400V V_{GE}=0/15V I_C=6A R_G=10 Inductive load	-	10	-	ns
t_r	Rise time		-	8	-	ns
$t_{d(off)}$	Turn-off delay time		-	79	-	ns
t_f	Fall time		-	56	-	ns
E_{on}	Turn-on energy		-	0.11	-	mJ
E_{off}	Turn-off energy		-	0.10	-	mJ
E_{ts}	Total switching energy		-	0.21	-	mJ
$t_{d(on)}$	Turn-on delay time	V_{CC}=400V V_{GE}=0/15V I_C=6A R_G=10 Inductive Load T_{vj}=175	-	11	-	ns
t_r	Rise time		-	10	-	ns
$t_{d(off)}$	Turn-off delay time		-	108	-	ns
t_f	Fall time		-	89	-	ns
E_{on}	Turn-on energy		-	0.16	-	mJ
E_{off}	Turn-off energy		-	0.16	-	mJ
E_{ts}	Total switching energy		-	0.32	-	mJ

All d c i f ai i c igh ed a d bjec legal di clai e .

$_F$	Diode forward voltage	$_F$=6A	-	1.6	- V
		$_F$=6A, $_{vj}$=175	-	1.4	- V

r

All d c i f ai i c igh ed a d bjec legal di clai e .

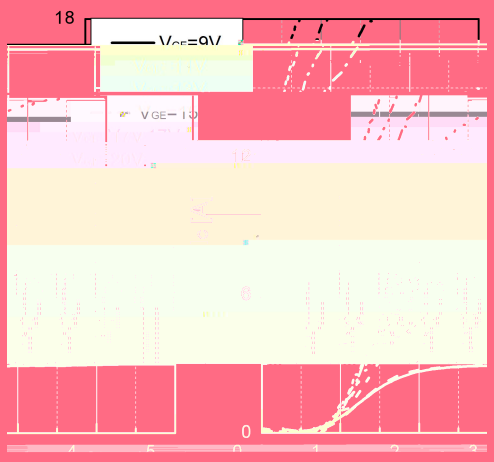


Fig 1. Typical output characteristic ($_{vj}$=25)

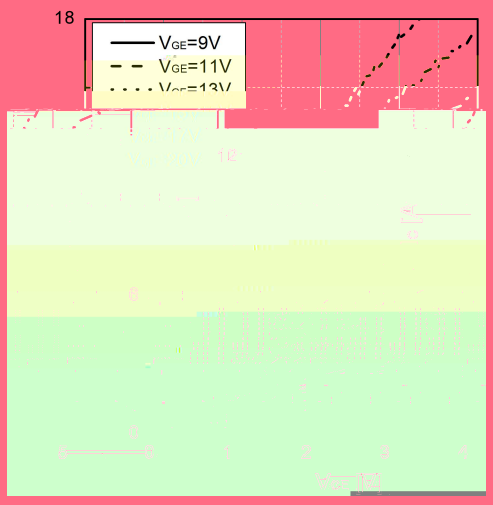


Fig 2. Typical output characteristic($_{vj}$=175)

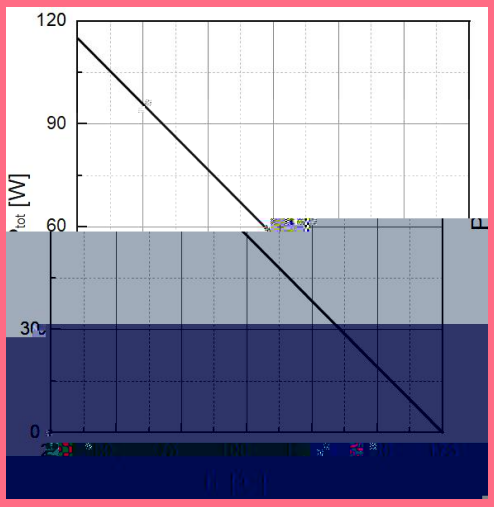


Fig 3.Power dissipation as a function of


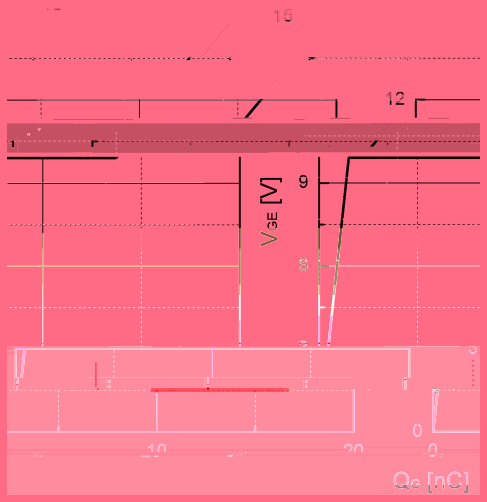



Fig 4. Typical G

All d c i f a i i c igh ed a d bjec legal di clai e .




All d c i f ai i c igh ed a d bjec legal di clai e .

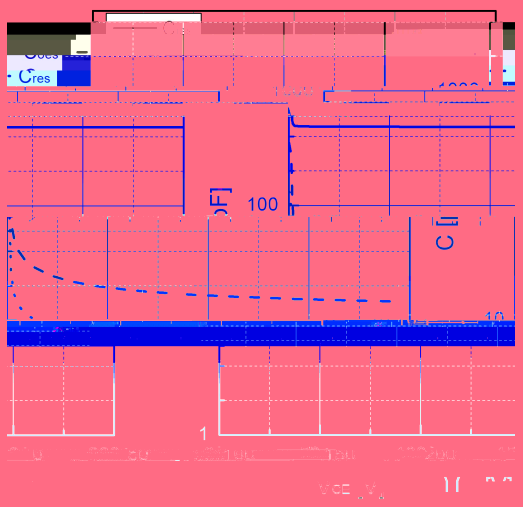

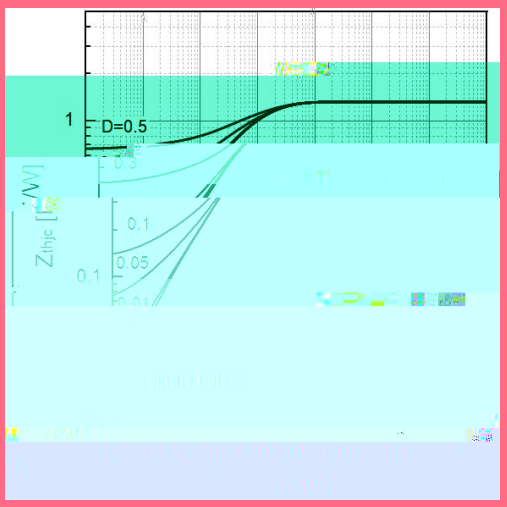

All d c i f ai i c igh ed a d bjec legal di clai e .

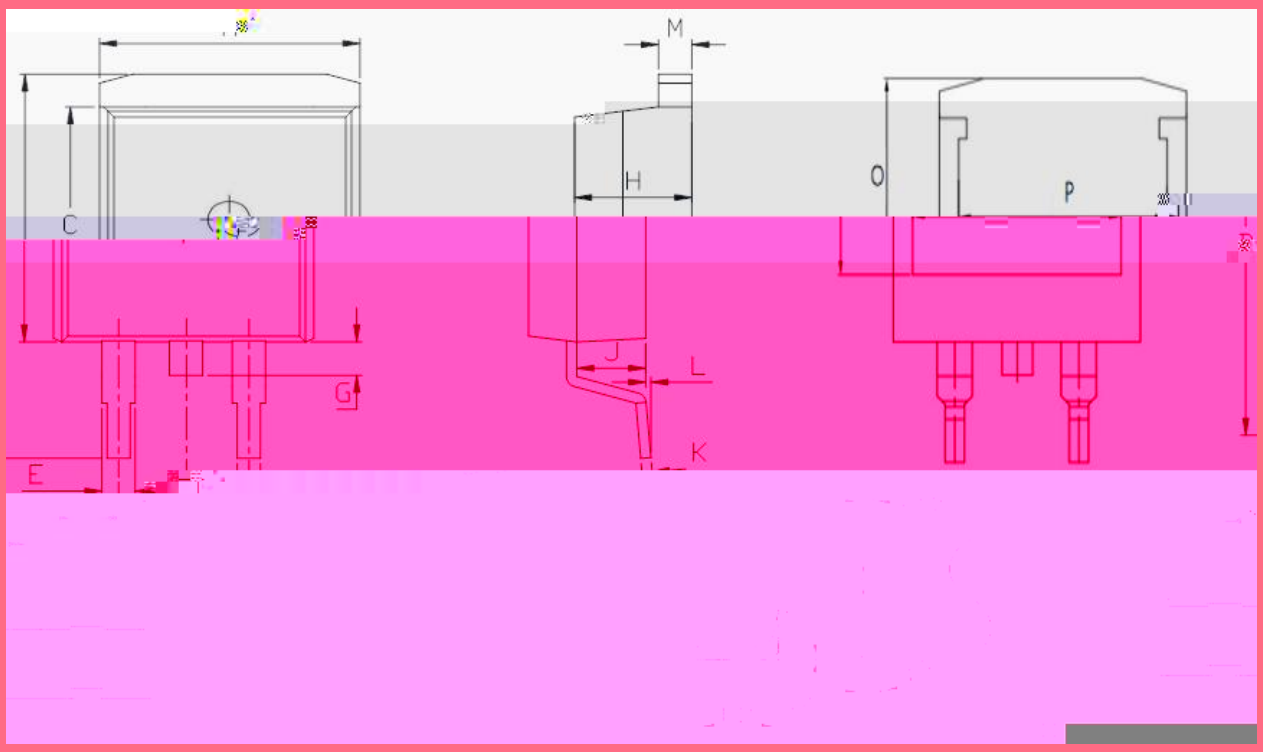

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90	-	10.20	0.390	-	0.402
B	14.70	-	15.80	0.579	-	0.622
C	8.8	-	9.4	0.346	-	0.370
D	-	2.54	-	-	0.100	-
E	1.37	-	1.57	0.054	-	0.062
F	0.75	-	0.85	0.029	-	0.033
G	-	-	1.75	-	-	0.069
H	4.30	-	4.70	0.169	-	0.185
J	2.30	-	2.70	0.091	-	0.106
K	0.38	-	0.55	0.015	-	0.022
L	0	0.15	0.25	0	0.006	0.010
M	1.25	-	1.35	0.049	-	0.053
O	7.4	7.65	7.9	0.291	0.301	0.311
P	8.3	8.6	8.9	0.327	0.339	0.350
L2	2.20	2.35	2.50	0.087	0.093	0.098

All d c i f ai i c igh ed a d bjec legal di clai e .

Date	Revision	Changes
202.	m	

All d c i f ai i c igh ed a d bjec legal di clai e .



All d c i f ai i c igh ed a d bjec legal di clai e .