JJMICROELECTRONICS

Symbol	Parameter	Values	Unit
CES	Collector-emitter voltage	650	V
GES	Gate-emitter voltage	±20	V
C	Continuous collector current (C=25)	12	A
	Continuous collector current (C=100)	6	A
CM	Pulsed collector current, p limited by vjmax	24	A
F	Diode continuous forward current (C=100)	6	A
FM	Diode maximum current, p limited by vjmax	24	A
sc	Short circuit withstand time	8	μs
tot	Power dissipation (C=25)	88	W
	Power dissipation (C=100)	44	W
vj	Operating junction temperature range	-40 to +175	
stg	Storage temperature range	-55 to +150	

All product information is copyrighted and subject to legal disclaimers.

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
$_{CES}$	Collector-emitter breakdown voltage	$_{GE}$=0V, $_{C}$=250μA	650	-	-	V
$_{CES}$	Collector-emitter leakage current	$_{CE}$=650V, $_{GE}$=0V	-	-	10	μ

All product

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
$t_{d(on)}$	Turn-on delay time		-	9	-	ns
t_r	Rise time		-	18	-	ns
$t_{d(off)}$	Turn-off delay time	V_{CC}=400V V_{GE}=0/15V I_C=6A R_G=10Ω Inductive load	-	24	-	ns
t_f	Fall time		-	91	-	ns
E_{on}	Turn-on energy		-	0.18	-	mJ
E_{off}	Turn-off energy		-	0.09	-	mJ
E_{ts}	Total switching energy		-	0.27		

All product information is copyrighted and subject to legal disclaimers.

Electrical characteristics of Diode ($_{vj}$=25 unless otherwise specified)

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
$_{F}$	Diode forward voltage	$_{F}$=6A	-	1.4	-	V
		$_{F}$=6A, $_{vj}$=175	-	1.2	-	V
$_{rr}$	Diode reverse recovery time	$_{R}$=400V $_{F}$=6A d $_{F}$/d =-500A/μs	-	55	-	ns
$_{rrm}$	Diode peak reverse recovery current		-	10	-	A
$_{rr}$	Diode reverse recovery charge		-	306	-	nC
$_{rr}$	Diode reverse recovery time	$_{R}$=400V $_{F}$=6A d $_{F}$/d =-500A/μs $_{vj}$=175	-	98	-	ns
$_{rrm}$	Diode peak reverse recovery current		-	12	-	A
$_{rr}$	Diode reverse recovery charge		-	529	-	nC

All product information is copyrighted and subject to legal disclaimers.

Typical performance characteristics

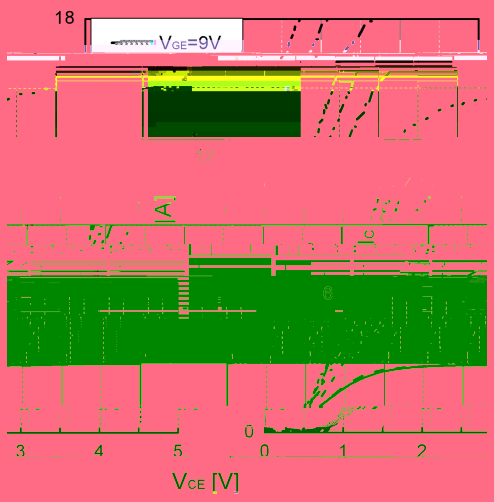


Fig 1. Typical output characteristic (vj=25)

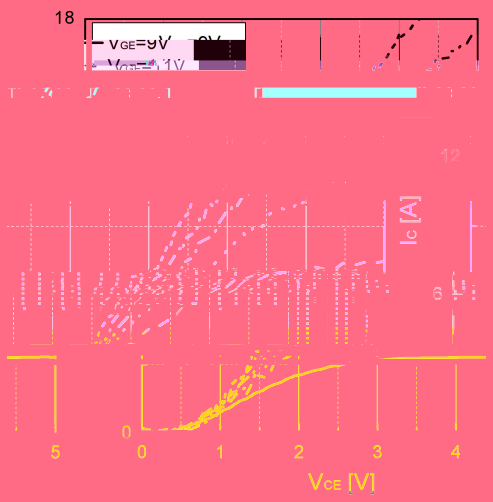


Fig 2. Typical output characteristic(vj=175)

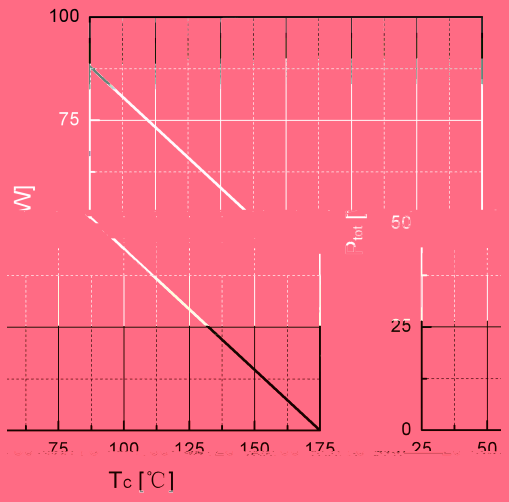


Fig 3.Power dissipation as a function of

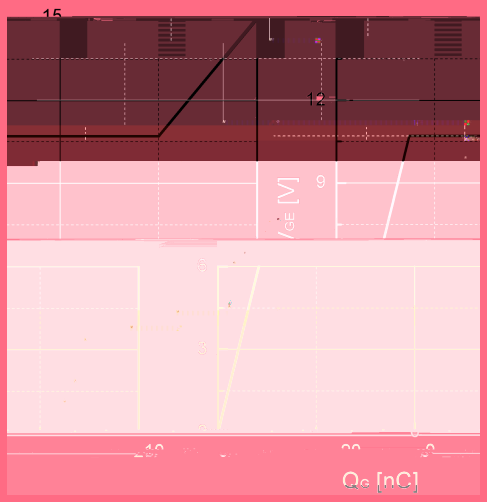


Fig 4. Typical Gate charge

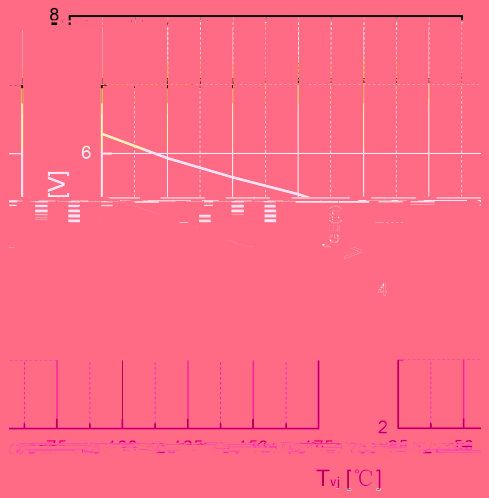


Fig 5. Typical GE(th) as a function of vj (C=1mA)

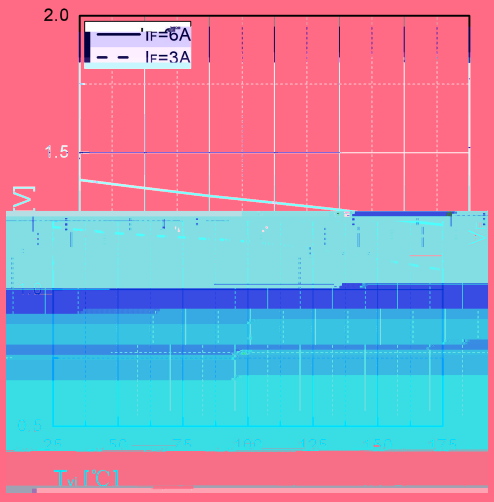


Fig 6. Typical F as a function of vj

All product information is copyrighted and subject to legal disclaimers.

All product information is copyrighted and subject to legal disclaimers.

Typical performance characteristics


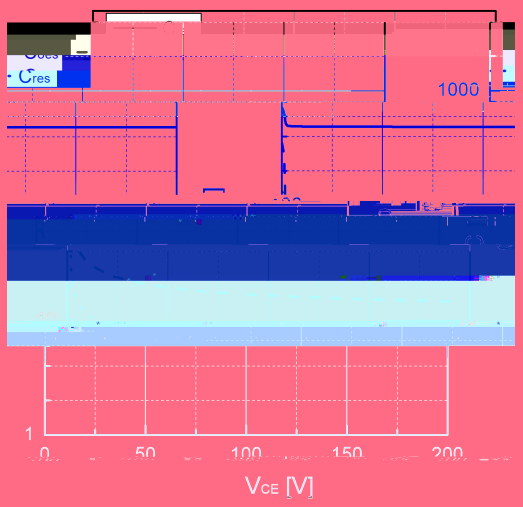


Fig 13. Typical capacitance as a function of $_{CE}$ (f=1Mhz,

All product information is copyrighted and subject to legal disclaimers.

Package dimension

TO-263

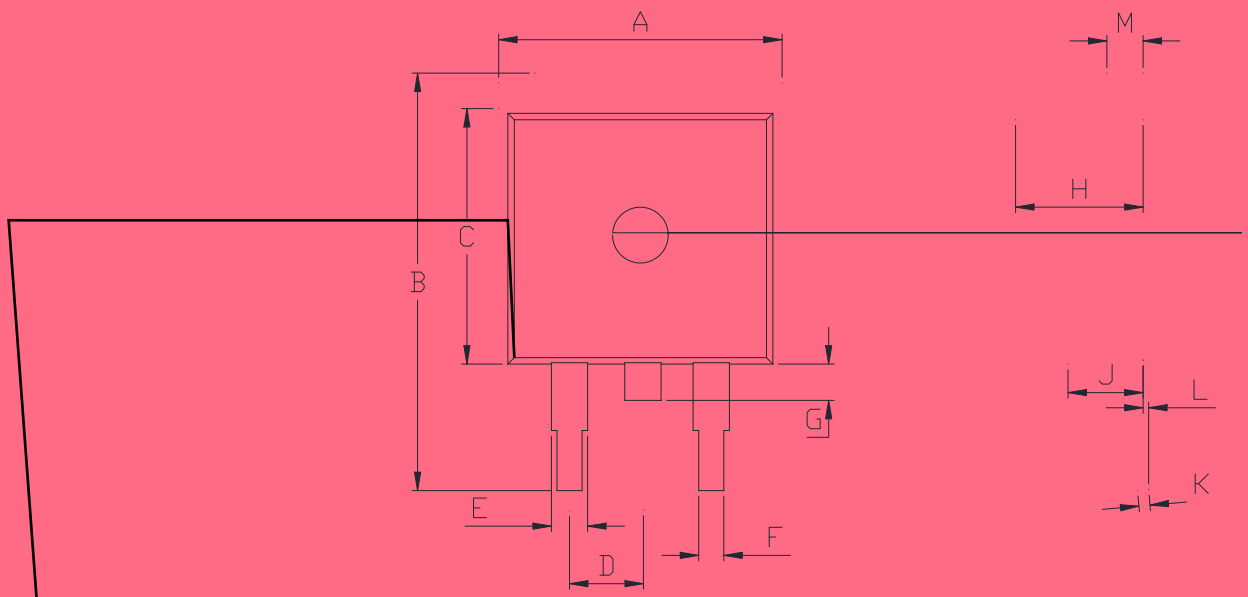

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90	-	10.20	0.390	-	0.402
B	14.70	-	15.80	0.579	-	0.622
C	9.4	-	9.6	0.37	-	0.378
D	-	2.54	-	-	0.100	-
E	1.20	-	1.40	0.047	-	0.055
F	0.75	-	0.85	0.029	-	0.033
G	-	-	1.75	-	-	0.069
H	4.40	-	4.70	0.173	-	0.185
J	2.30	-	2.70	0.091	-	0.106
K	0.38	-	0.55	0.015	-	0.022
L	0	0.10	0.25	0	0.004	0.010
M	1.25	-	1.35	0.049	-	0.053

All product information is copyrighted and subject to legal disclaimers.

Date	Revision	Changes
2025-03-19	Rev.1.0	Release of the datasheet

Disclaimer

PLEASE NOTE - Jiangsu JieJie Microelectronics Co., Ltd ("JJM") reserves the right to amend, correct, modify and enhance the product and/or this document at any time without prior notice. If you intend to purchase this product, please obtain the latest information available before placing your order. The sale of JJM products is governed by JJM's standard terms and conditions at the time of purchase and purchasers are solely responsible

All product information is copyrighted and subject to legal disclaimers.