
ACJT02K-1000SW 2A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJT02K-1000SW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT02K-1000SW embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-252 is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	1000	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	1000	V
RMS on-state current ($T_C \leq$ 107)	$I_{T(RMS)}$	2	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	25	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		27.5	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	3.125	A^2s
Critical rate of rise of on-state current (I_G=2 I_{GT} , f=100Hz , T_j=125)	dI/dt	100	A/εs

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	4.75	kV


ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	10	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3kΩ	- -	MIN.	0.2	V

ORDERING INFORMATION

AC J T 02 K -1000 SW -/


FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

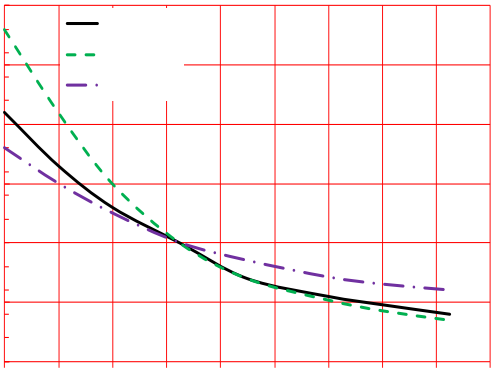

PACKAGE MECHANICAL DATA

Dimensions

Millimeters l.jjwdz.com 44/.nw



DELIVERY MODE

