
ACJT08C-1000SW 8A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJT08C-1000SW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT08C-1000SW embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-220C is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit	-	-

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	2.25	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33	- -	MAX.	10	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3k	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	25	mA
				30	
I_H	I_T =100mA		MAX.	15	mA
dV/dt	V_D=670V Gate Open T_j =125		MIN.	350	V s
(dI/dt)c	G 9 G W F j=125V 7		MIN.	3.5	A/ms
t_{on}	I_G=20mA I_A=200mA I_R=20mA T_j=25		TYP.	4	s
t_{off}				50	
V_{CL}	I_{CL}=0.1mA t_p=1ms		MIN.	1050	V

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM} =10A t_p=380 s	T_j=25	1.45	V
V_{TO}	Threshold voltage	T_j=125	0.78	V 0j EMC /P <<

ORDERING INFORMATION

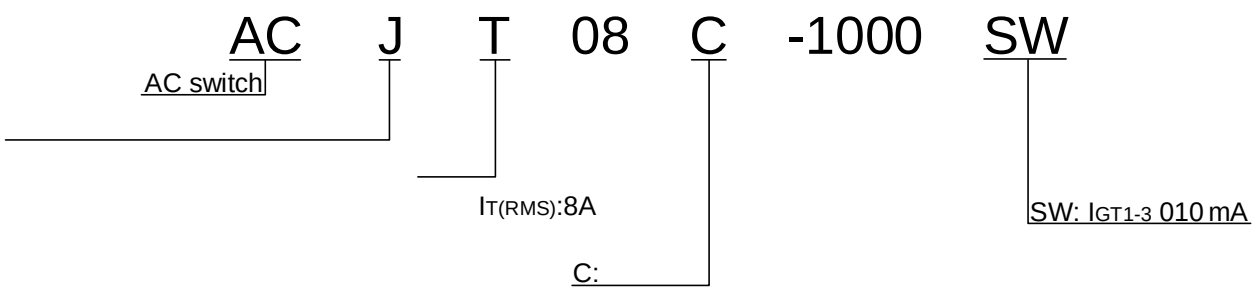


FIG.1: Maximum power dissipation versus RMS on-state current



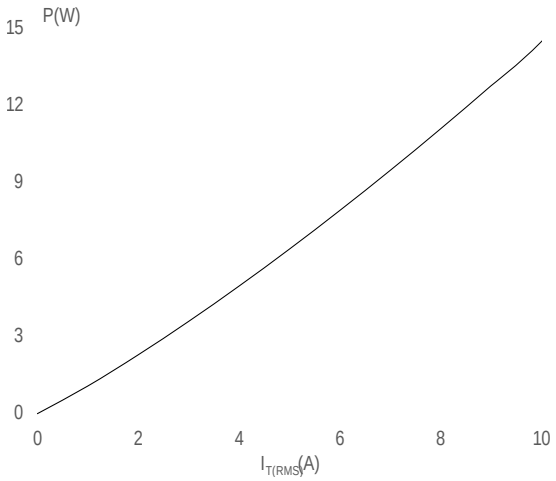


FIG.2: RMS on-state current versus case temperature

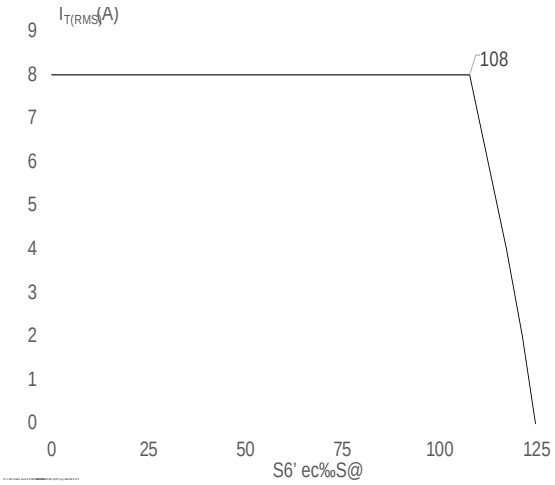

IG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

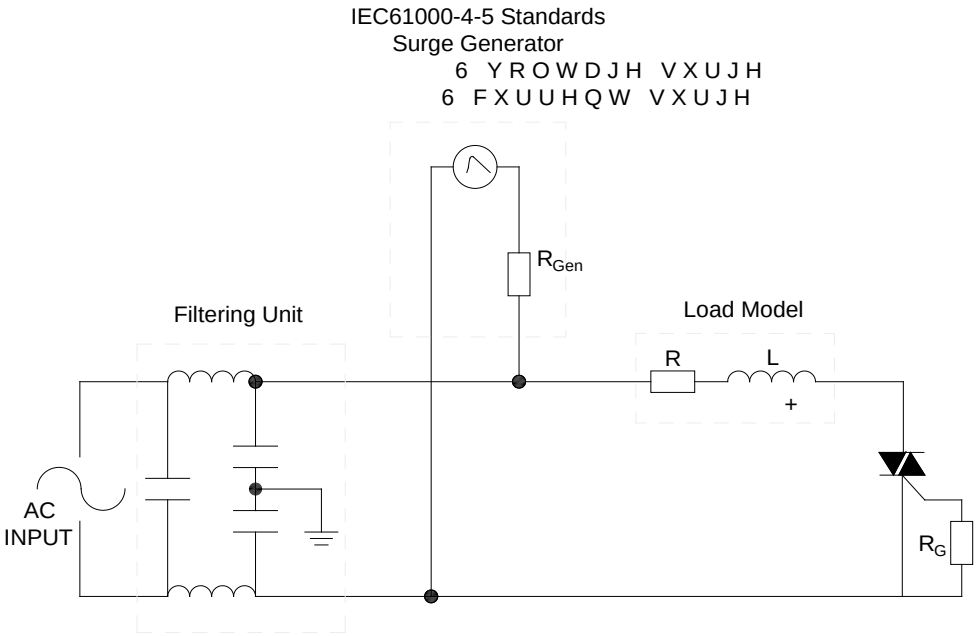

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJT08C-1000SW	1000	10	TO-220C	50	Tube

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated
Oct.15, 2025	A.1.1	3 1 5 0 . 5 6 0 1 d ( ) T 2 7 ( )] T J