
ACJT1635-10A 16A TRIAC

Rev.A.1.1

The ACJT1635-10A triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT1635-10A embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. By using an internal ceramic pad, ACJT1635-10A provides a rated insulation voltage of 2500 VRMS, complying with UL standards (File ref: E252906). Package TO-220A is RoHS compliant.

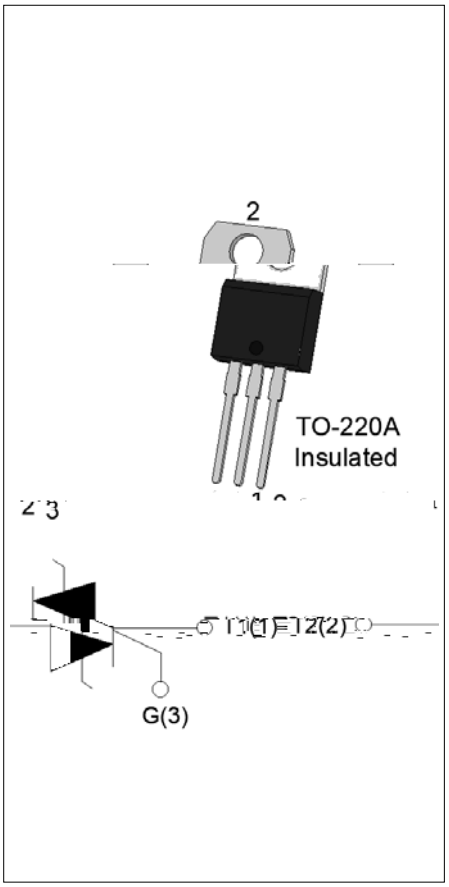


Symbol	Value	Unit
$I_{T(RMS)}$	16	A
V_{DRM} /V_{RRM}	1000	V
I_{GT} / /	35/35/35	mA


Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	1000	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	1000	V
RMS on-state current (T_C 82)	$I_{T(RMS)}$	16	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	160	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		176	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	128	A^2s
Critical rate of rise of on-state current (I_G=2 × I_{GT} , f=100Hz , T_j=125)	dI/dt	100	A/μs
Peak gate current (t_p=20μs , T_j=125)	I_{GM}	4	A

Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	4.5	kV

(T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value	Unit

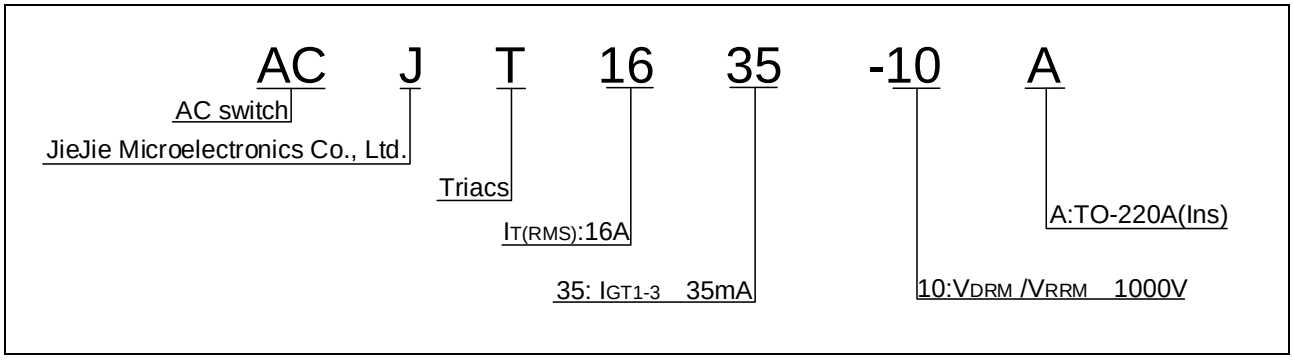
AC J T 16 35 -10 A
AC switch
JieJie Microelectronics Co., Ltd.
Triacs
IT(RMS):16A
35: IGT1-3 35mA
10:VDRM /VRRM 1000V
A:TO-220A(Ins)

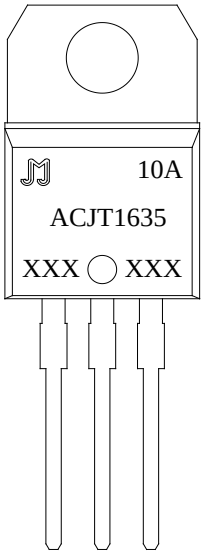
10A
ACJT1635
XXX XXX




XXX XXX
Year
Month
Production Code

FIG.1: Maximum power dissipation versus RMS on-state current

FIG.2: RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

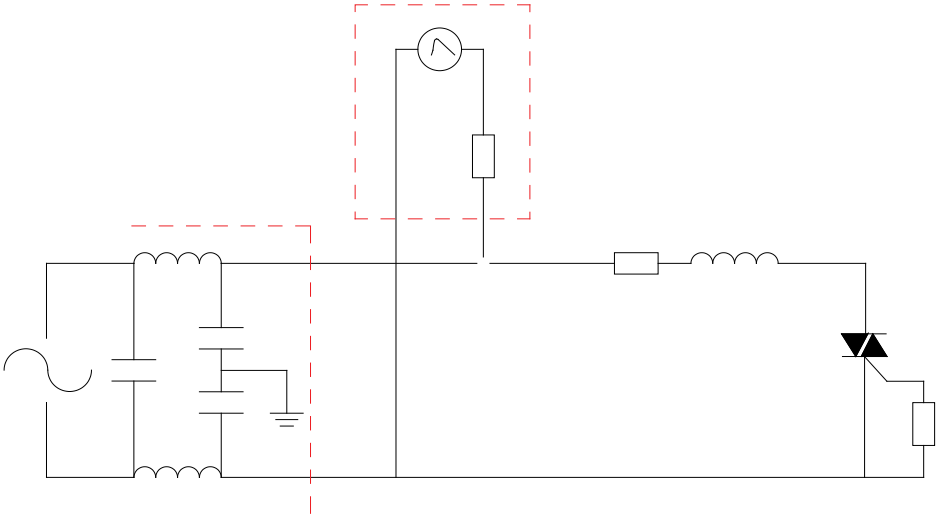

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJT1635-10A	1000	35	TO-220A(Ins)	50	Tube

Document Revision History

Date	Revision	Changes
Apr.13, 2023	A.1.0	Last updated
Oct.13, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

