
JCT616C 16A SCR

Rev.A.1.1

DESCRIPTION:

With high ability to withstand the shock loading of large current, JCT616C of silicon controlled rectifiers provides high dV/dt rate with strong resistance to electromagnetic interference.It is especially recommended for use on solid state relay, motorcycle, power charger, T-tools etc.
Package TO-220C is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
Average on-state current (T_C 102)	$I_{T(AV)}$	10	A
RMS on-state current (T_C 102)	$I_{T(RMS)}$	16	A
Non repetitive surge peak on-state current (t_p=10ms, T_j=25)	I_{TSM}	150	A
Non repetitive surge peak on-state current (t_p=8.3ms, T_j=25)		165	

I^2t value fore f7 (e fc 0.006 Tw 12 .2 re .149.5 ( )86 (ue (0.00t2.104 0 Td ( )T41.72 168.72 Tm8 3

Average gate power dissipation (T_j=125)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	20	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	0.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	
I_{GT}	V_D=12V R_L=33Ω	-	-	15	mA
V_{GT}		-	-	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3kΩ	0.2	-	-	V
I_L	I_G=1.2I_{GT}	-	-	60	mA
I_H	I_T=500mA	-	-	50	mA
dV/dt	V_D=400V Gate Open T_j=125	1200	-	-	V/μs
t_{on}	I_G=20mA I_A=200mA I_R=20mA T_j=25	-	4	-	μs
t_{off}		-	60	-	


STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=32A t_p=380μs	T_j=25	1.55	V
V_{TO}	Threshold voltage	T_j=125	0.77	V
R_D	Dynamic resistance	T_j=125	24	mΩ
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	μA
I_{RRM}		T_j=125	0.2	mA


THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (DC)	1.1	/W
$R_{th(j-a)}$	junction to ambient (DC)	50	/W

ORDERING INFORMATION

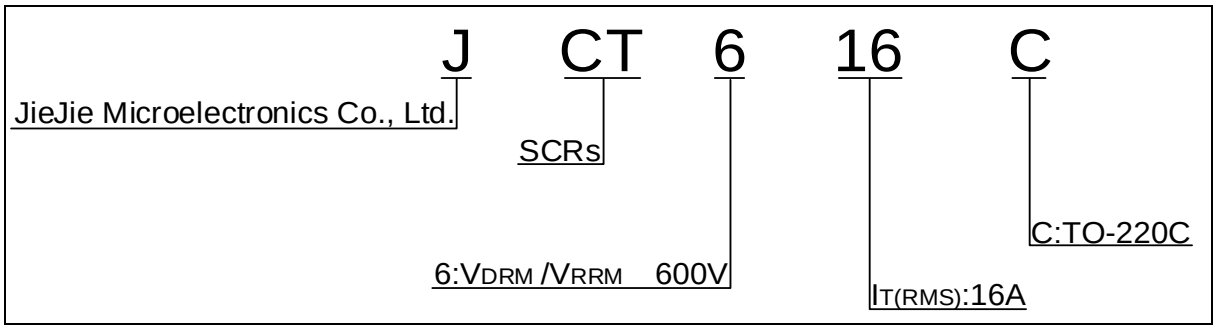


MARKING

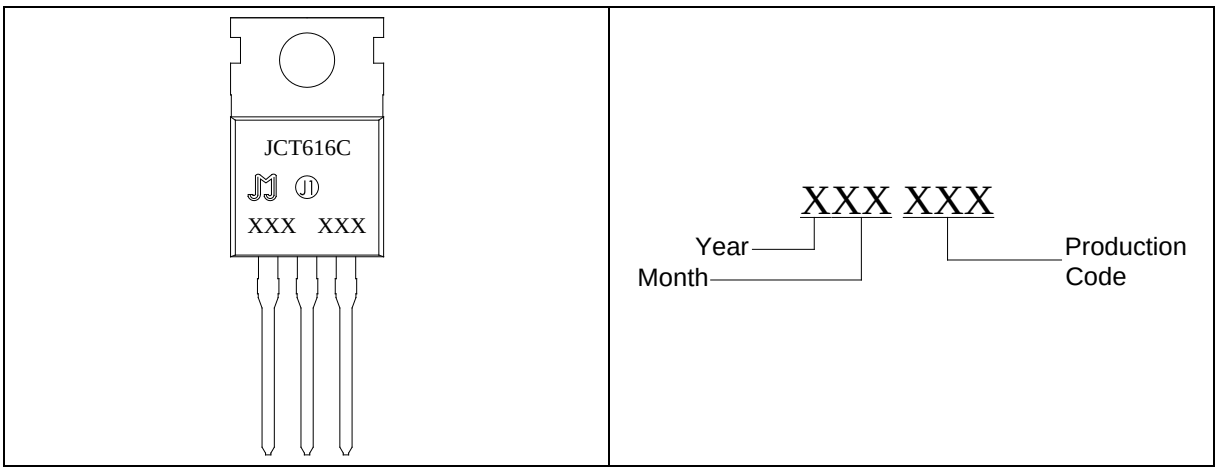

TTw 118.48 re FIG.1 Maximum power dissipation versus RMS on-state current FIG.2: RMS on-state current

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards.

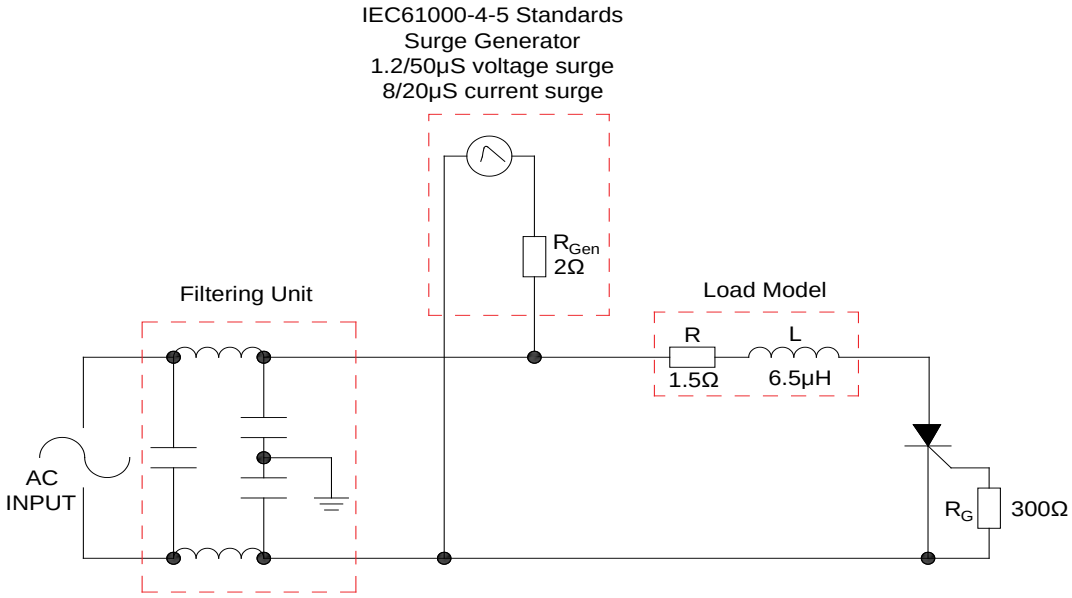

LEAD FORMING AND SOLDERING

Refer to the application note “Assembly Instructions for Thyristors in Through-hole Package” released by JieJie

JCT616C

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and inf agreemrvi in this dvme use no infr0 (i)0 (ng)1 (n)10 (m)-3 (en)10 (t)4 ( )10d [91