JR0405V 2A SCR

Rev.A.1.1

DESCRIPTION:

The JR0405V SCR with the parallel resistor between Gate and Cathode, R_{GK}=10~80kΩ are especially recommended for use on straight hair, igniter, anion generator, etc. Package SOT-223 is RoHS compliant.

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	2	A
V_{DRM}/V_{RRM}	600	V
I_{GT}	≤200	μA

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
Average on-state current (T_C ≤ 77)	$I_{T(AV)}$	1.3	A
RMS on-state current (T_C ≤ 77)	$I_{T(RMS)}$	2	A
Non repetitive surge peak on-state current (t_p=10ms , T_j=25)	I_{TSM}	25	A
Non repetitive surge peak on-state current (t_p=8.3ms , T_j=25)		28	

Peak gate power	P_{GM}	5	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	0	


JR0405V

JR0405V **JieJie M**

FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

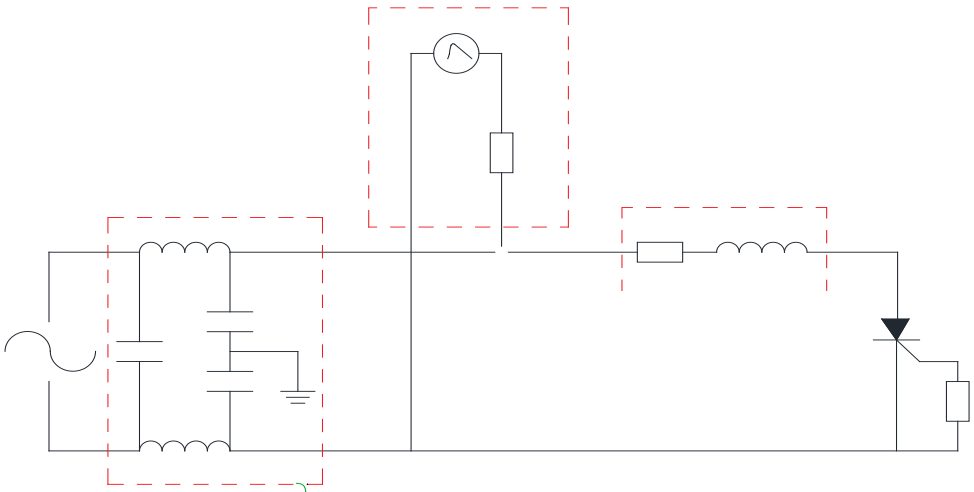


PACKAGE MECHANICAL DATA

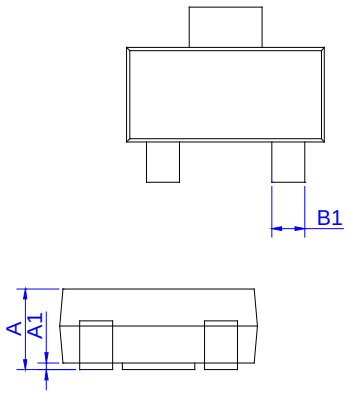

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.50	1.60	1.80	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.90	3.00	3.10	0.114	0.118	0.122
B1	0.60	0.70	0.80	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.30	6.50	6.70	0.248	0.256	0.264
E	3.30	3.50	3.70	0.130	0.138	0.146
F	4.40			0.173		
F1	2.20			0.087		
G	0.50		1.00	0.020		0.039
H	1.50	1.75	2.00	0.059	0.069	0.079
J	6.70	7.00	7.30	0.264	0.276	0.287
K						

DELIVERY MODE-REEL TAPE

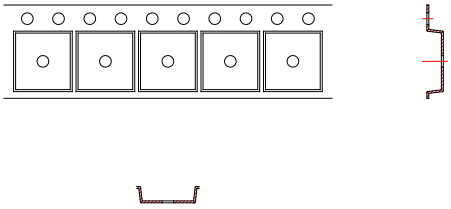

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	-		12.30	-		0.482
E	1.65	1.75	1.85	0.065	0.069	0.073
F	5.45	5.50	5.55	0.215	0.217	0.219
D0		1.55	1.60		0.061	0.063
D1		-	-			
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.95	2.00	2.05	0.077	0.079	0.081
10P0	39.80	40.00	40.20	1.567	1.575	1.583
A0	6.85	6.95	7.05	0.269	0.273	0.276
B0	7.15	7.25	7.35	0.280	0.284	0.288
K0	1.95	2.05	2.15	0.076	0.080	0.084
T	0.20	0.25	0.30	0.008	0.010	0.012