JST23H-6A 25A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST23H-6A triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, JST23H-6A provides a very high switching capability up to junction temperatures of 150°C. By using an internal ceramic pad, JST23H-6A provides a rated insulation voltage of 2500 VRMS, complying with UL standards (File ref: E252906). Package TO-220A is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}		

Average gate power dissipation (T_j=150)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	2	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified) **48 7c 2 249.32 6520107982.2**

ORDERING INFORMATION

J ST 23 H -6 A

FIG.1: Maximum power dissipation versus RMS on-state current

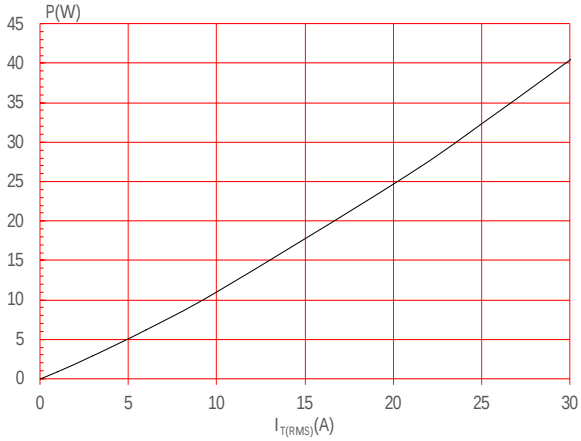


FIG.2: RMS on-state current versus case temperature

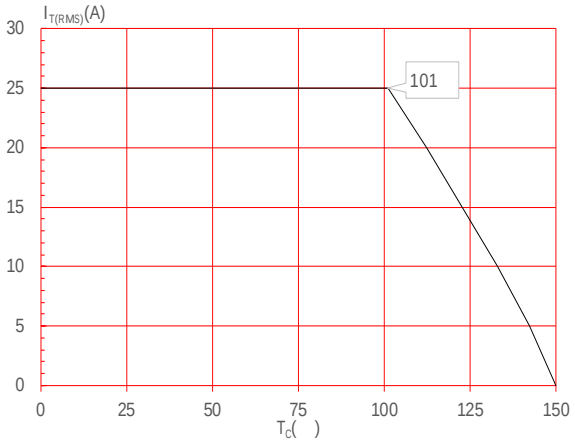


FIG.3: Surge peak on-state current versus number of cycles

FIG.4: On-state characteristics

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

