MCR100-8 1A Sensitive SCR

Rev.A.2.1

The MCR100-8 SCR provides high dV/dt rate with strong resistance to electromagnetic interface. It is especially recommended for use on residual current circuit breaker, straight hair, igniter etc. Complying with UL standards (File ref: E252906). Package TO-92 is RoHS compliant.

Symbol	Value	Unit
$I_{T(RMS)}$	1	A
V_{DRM} /V_{RRM}	800	V
I_{GT}	≤200	μA

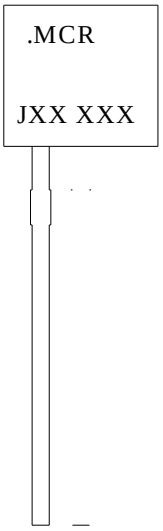
Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	800	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	800	V
Average on-state current ($T_C \leq 54$)	$I_{T(AV)}$	0.6	A
RMS on-state current ($T_C \leq 54$)	$I_{T(RMS)}$	1	A
Non repetitive surge			

Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.1	W
Peak gate power	P_{GM}	2	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	1	kV

NOTE 1: Operating junction temperature T_j is up to 125 when a resistor ≤1kΩ is connected between Gate and Cathode. Without this resistor, the T_j is up to 110 only.

(T_j=25 unless otherwise specified)

Symbol	Test Condition	Value	Unit


.MCR
JXX XXX

MCR100-8

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(μA)	Package	Base qty. (pcs)	Delivery mode
MCR100-8	800	≤200	TO-92	1,000	Bulk Pack
MCR100-8-TR				2,000	Tape & Reel

Document Revision History

Date	

PACKAGE	OUTLINE	BAG (PCS)	INNER BOX (PCS)	CARTON BOX (PCS)
TO-92	Bulk Pack	1,000	10,000	50,000

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
P	12.40	12.70	13.00	0.488	0.500	0.512
P0	12.40	12.70	13.00	0.488	0.500	0.512
P1	3.55	3.85	4.15	0.140	0.152	0.163
P2	5.95	6.35	6.75	0.233	0.250	0.265
P	-1.00	0	1.00	-0.039	0	0.039
F1 F2	2.30	2.50	2.70	0.090	0.098	0.106
F1-F2	-0.10	0	0.10	-0.004	0	0.004
W	17.50	18.00	19.00	0.689	0.709	0.748
W0	5.50	6.00	6.50	0.217	0.236	0.256
W1	8.50	9.00	9.50	0.335	0.354	0.374
W2			1.00			0.039
D0	3.80	4.00	4.20	0.150	0.157	0.165
H	-1.00	0	1.00	-0.039	0	0.039
L1	2.50			0.098		
H	18.00	19.00	20.00	0.709	0.748	0.787

MCR100-8