T0620H-8H 6A TRIAC

Rev.A.1.1

DESCRIPTION:

The T0620H-8H triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T0620H-8H provides a very high switching capability up to junction temperatures of 150°C. From T2 terminals to external heatsink. Package TO-251 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-150	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	800	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	800	V


Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	3	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	20	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =150 R_L =3.3kΩ	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	40	mA

T

ORDERING INFORMATION

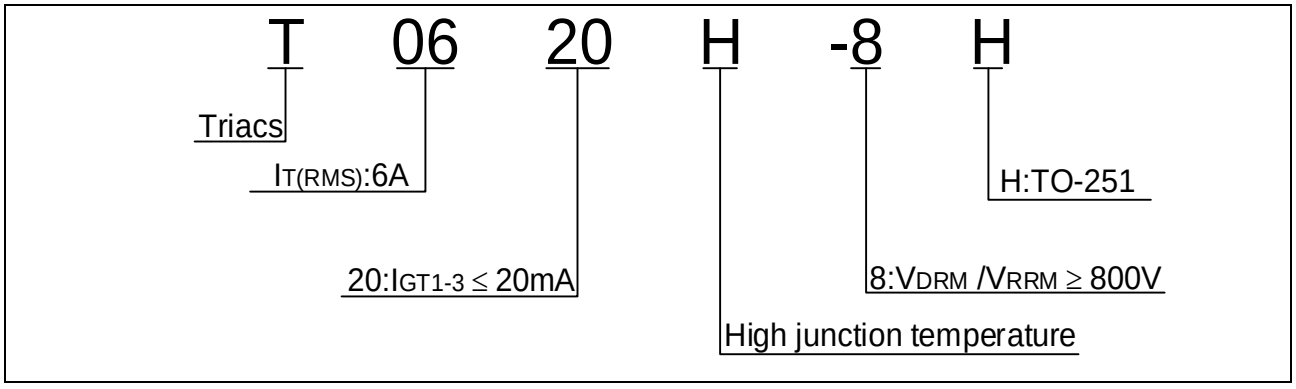

MARKING

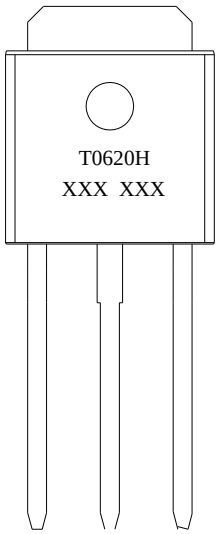


FIG.1: Maximum power dissipation versus RMS on-state current


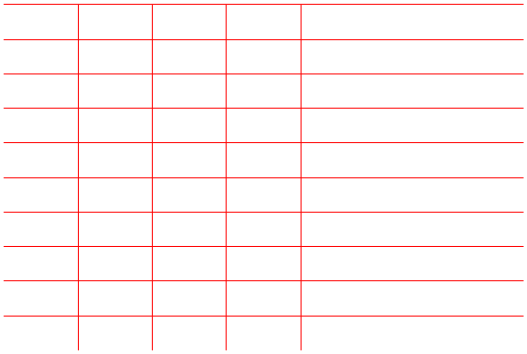


FIG.2: RMS on-state current versus case temperature


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

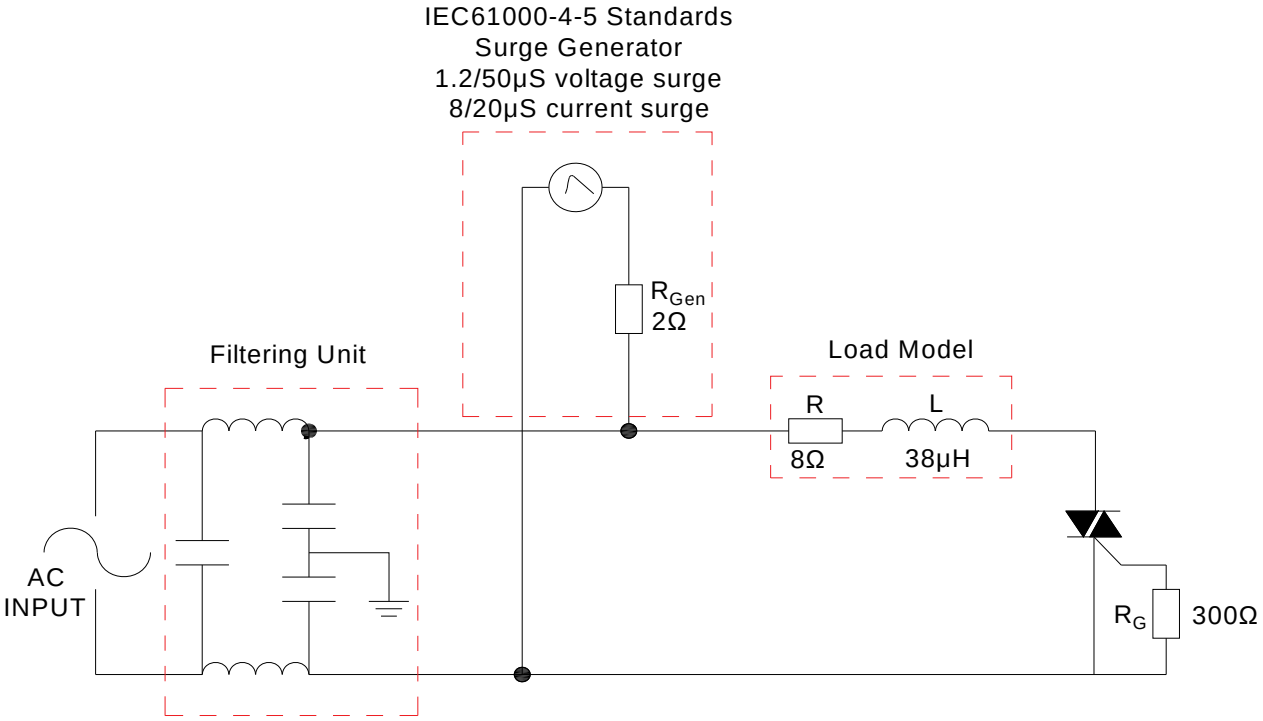

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery

PACKAGE MECHANICAL DATA



Information furnished in this document is believed to be accurate and reliable. However,
Jiangsu JieJie Microelectronics Co.,