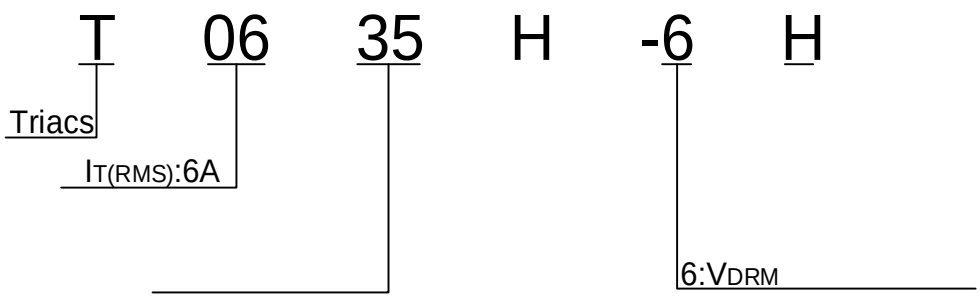
T0635H-6H 6A TRIAC

Rev.A.1.1


The T0635H-6H triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating r

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	3	kV

(T_j=25 unless otherwise specified)


T 06 35 H -6 H
Triacs
IT(RMS):6A
6:VDRM

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery

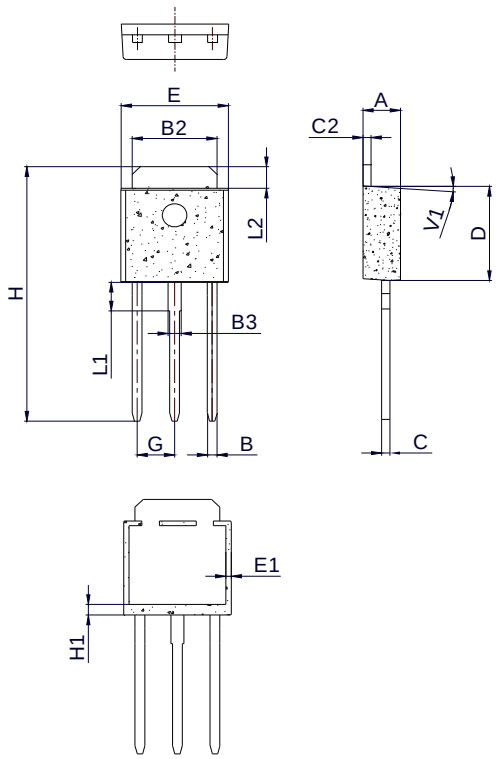

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.086		0.095
A2	1.00		1.30	0.039		0.051
B	0.50		0.70	0.020		0.028
B2	5.10		5.40	0.200		0.213
B3						
C						
C2						
D						
E						
E1	0.60		1.00	0.024		0.039
G						
H	16.00		17.00	0.630		0.669
H1	1.45		1.85	0.057		0.073
L1						

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. ɹ ɔ Ǝ ʻ ʻ я ʻ