T0810H-6E 8A TRIAC

Rev.A.1.1

DESCRIPTION:

The T0810H-6E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T0810H-6E provides a very high switching capability up to junction temperatures of 150°C. It can be driven directly through the MCU I/O port. Package TO-263 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-150	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
RMS on-state current ($T_C \leq$ 133)	$I_{T(RMS)}$	8	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	80	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		88	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	32	A^2s
Critical rate of rise of on-state current (I_G=2 × I_{GT} , f=100Hz , T_j=150)	dI/dt	50	A/μs
Peak gate current (t_p=20μs , T_j=150)	I_{GM}	4	A


A481 31.199 re f 495.84 114.0.002 02 Tw 12 0 0 12 62.04 75 8.0a7 (t)]et

Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	2.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	10	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =150 R_L =3.3kΩ	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	25	mA
				40	
I_H	I_T =100mA		MAX.	25	mA
dV/dt	V_D=400V Gate Open T_j =150		MIN.	200	V/μs

ORDERING INFORMATION

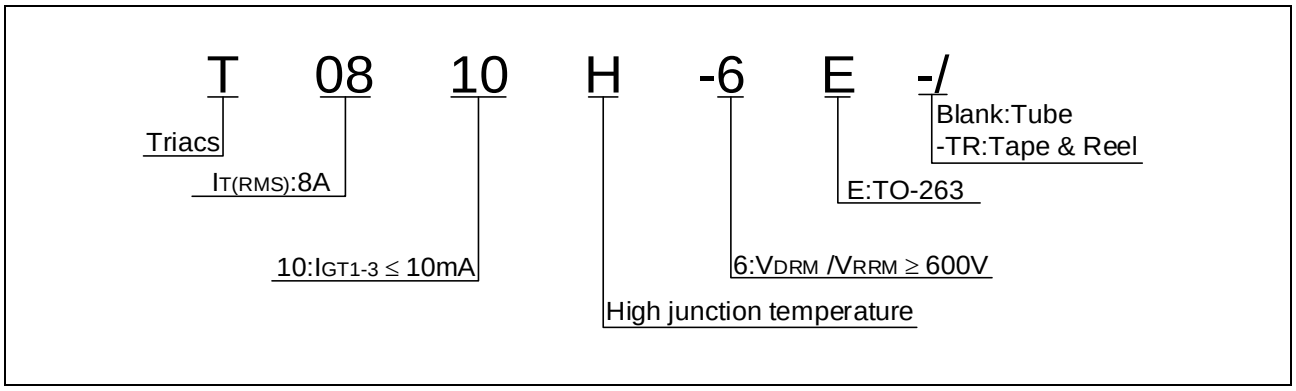

MARKING

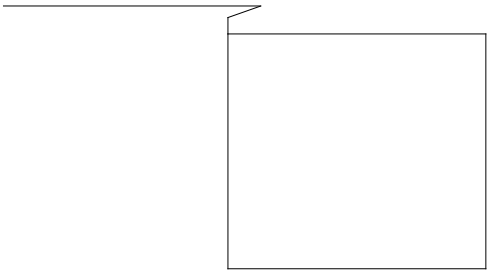


FIG.1: Maximum power dissipation versus RMS on-state current

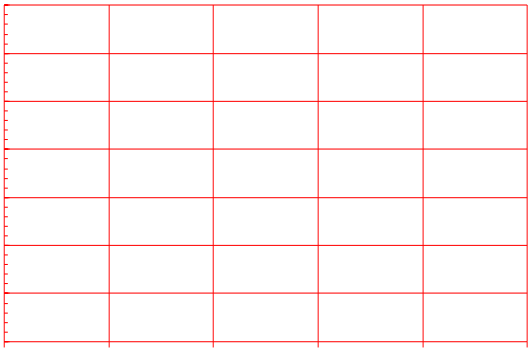



FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

2.5



FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

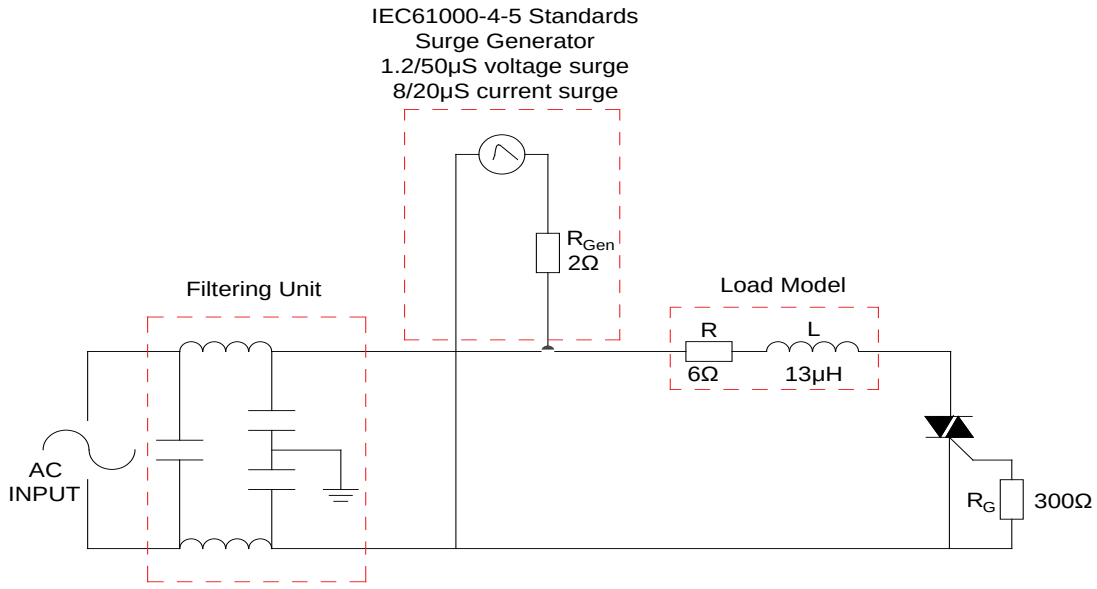

ORDERING INFORMATION

Order code	

PACKAGE MECHANICAL DATA

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50			
F						

DELIVERY MODE

