T0850H-8K 8A TRIAC

Rev.A.1.2

DESCRIPTION:

The T0850H-8K triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T0850H-8K provides a very high switching capability up to junction temperatures of 150°C. Package TO-252 is RoHS compliant.

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	8	A
V_{DRM} /V_{RRM}	800	V
I_{GT} / /	50/50/50	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-150	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	800	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	800	V
RMS on-state current (T_C 01 32)	$I_{T(RMS)}$	8	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	80	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		88	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	32	A^2s
Critical rate of rise of on-state current (I_G=2× I_{GT} , f=100Hz , T_j=150)	dI/dt	100	A s
Peak gate current (t_p=20 s , T_j=150)	I_{GM}	4	A
Average gate power dissipation (T_j=150)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	10	W

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	3.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33	- -	MAX.	50	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =150 R_L =3.3k	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	60	mA
				90	
I_H	I_T =100mA		MAX.	55	mA
dV/dt	V_D=540V Gate Open T_j =150		MIN.	2500	V s
(dI/dt)c	G 9 G W F j=9150V 7		MIN.	8	A/ms
t_{on}	I_G=80mA I_A=400mA I_R=40mA T_j=25		TYP.	5	s
t_{off}				50	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX .)	Unit
V_{TM}	I_{TM} =11A t_p=380 s	T_j=25	1.4	V
V_{TO}	Threshold voltage	T_j=150	0.78	V
R_D	Dynamic resistance	T_j=150	55	P
I_{DRM}	V_D =V_{DRM} V_R =V_{RRM}	T_j=25	5	A
I_{RRM}		T_j=150	1	mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	1.7	/W
$R_{th(j-a)}$	junction to ambient (AC)	70	/W

ORDERING INFORMATION


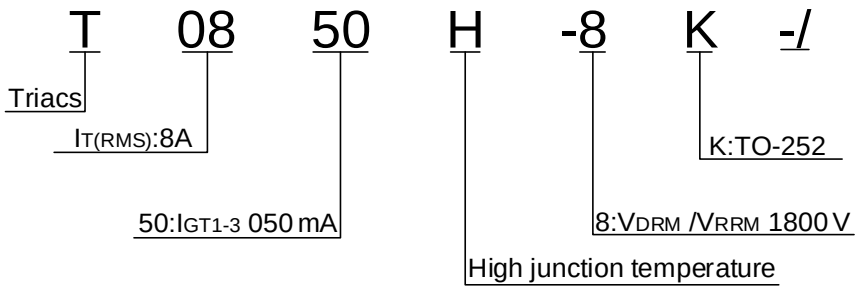


FIG.1: Maximum power dissipation versus RMS on-state current

FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

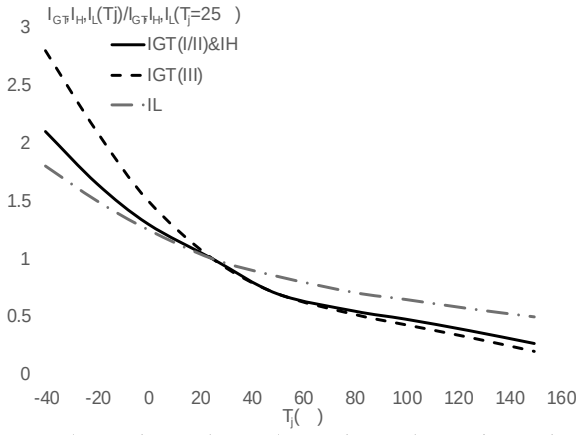


ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		H- I- J			
T0850H-8K	800	50	TO-252	80	Tube
T0850H-8K-TR				2,500	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.11, 2023	A.1.0	

PACKAGE MECHANICAL DATA DFOOTPRINT-T

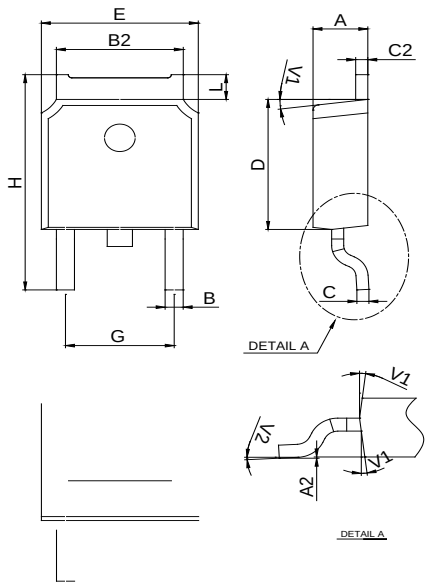

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.15	0		0.006
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1						
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
G1	2.18		2.38	0.086		0.094
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065