T1250H-8E 12A TRIAC

DESCRIPTION:

The T1250H-8E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T1250H-8E provides a very high switching capability up to junction temperatures of 150°C. Package TO-263 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	4.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33	- -	MAX.	50	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =150 R_L =3.3k	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	50	mA
				80	
I_H	I_T =500mA		MAX.	40	mA
dV/dt	V_D=540V Gate Open T_j =150		MIN.	2000	V s
(dI/dt)c	G 9 G W F j=9150V 7		MIN.	10	A/ms
t_{on}	I_G=80mA I_A=400mA I_R=40mA T_j=25		TYP.	3	s
t_{off}				70	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX .)	Unit
V_{TM}	I_{TM} =17A t_p=380 s	T_j=25	1.4	V
V_{TO}	Threshold voltage	T_j=150	03Tw ( )Tj EMC /P <</T1.94 0 Tc	

ORDERING INFORMATION

T 12 50 H -8 E -/

- T: Triacs
- 12: $I_{T(RMS)}$:12A
- 50: I_{GT1-3} 050 mA
- H: High junction temperature
- -8: V_{DRM} /V_{RRM} 1800 V
- E: TO-263
- -/: Blank:Tube; -TR:Tape & Reel

MARKING

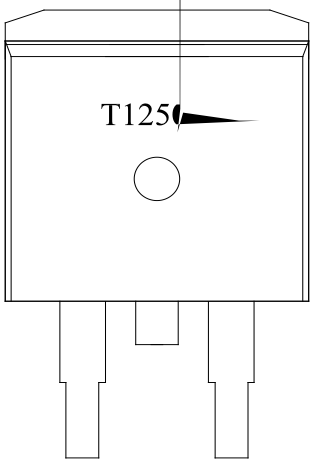


FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature


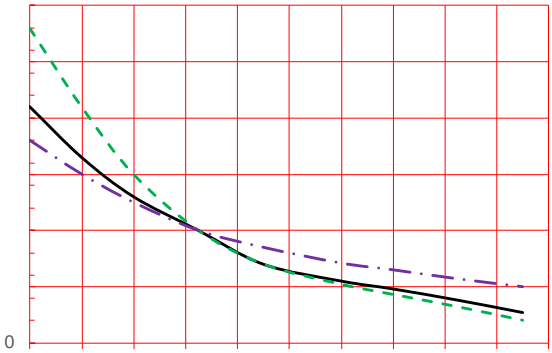


FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

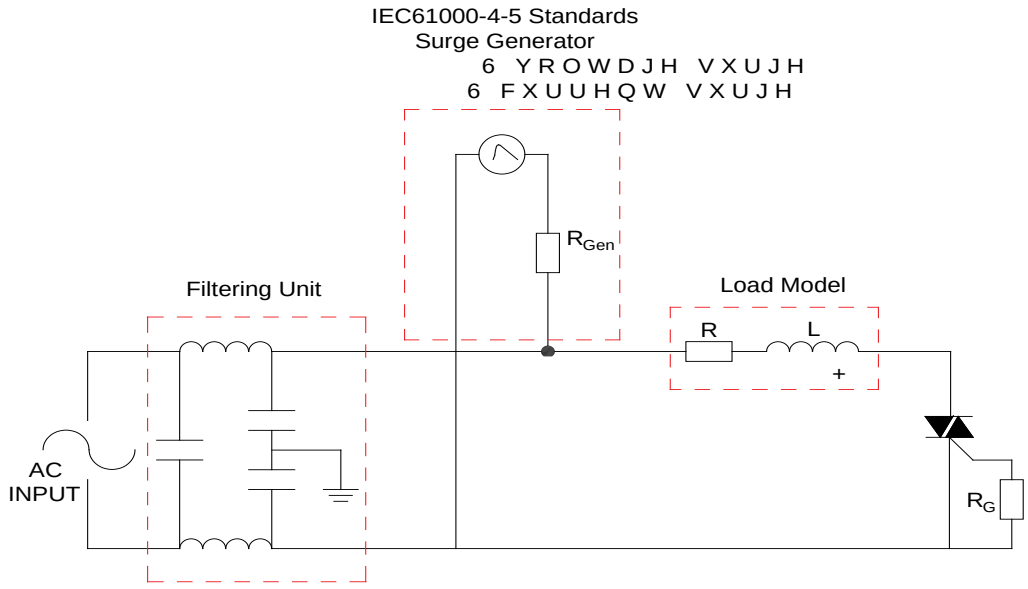

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T1250H-8E	800	50	TO-263	50	Tube
T1250H-8E-TR				800	Tape & Reel


Document Revision History

Date	Revision	Changes
Apr.11, 2023	A.1.0	Last updated
Oct.17, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGE MECHANICAL DATA

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50	0.047(0)		
F						

DELIVERY MODE

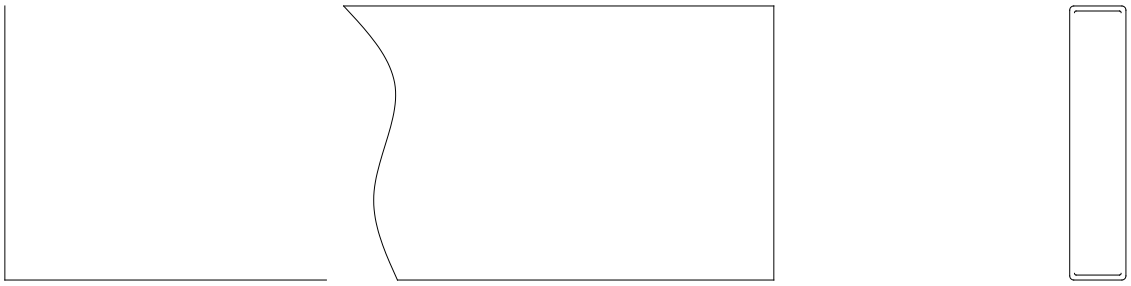

Information furnished in this document is believed to be accurate and reliable. However,