T 30 35 H -6 C

- T: Triacs
- 30: $I_{T(RMS)}$:30A
- 35: $I_{GT1-3} \leq$ 35mA
- H: High junction temperature
- -6: V_{DRM} /$V_{RRM} \geq$ 600V
- C: C:TO-220C

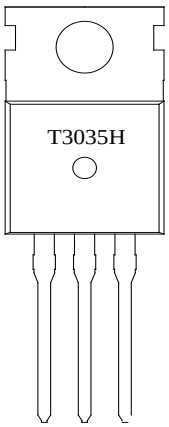


FIG.1: Maximum power dissipation versus RMS on-state current

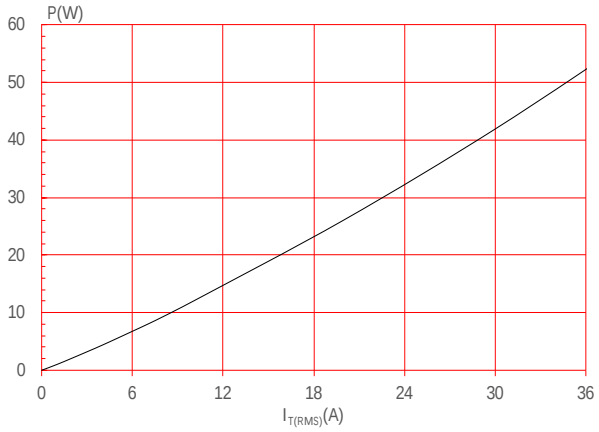


FIG.2: RMS on-state current versus case temperature


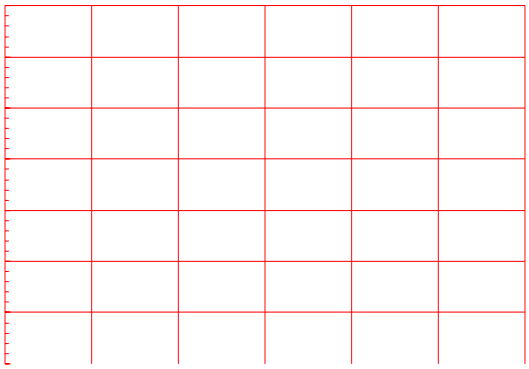


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

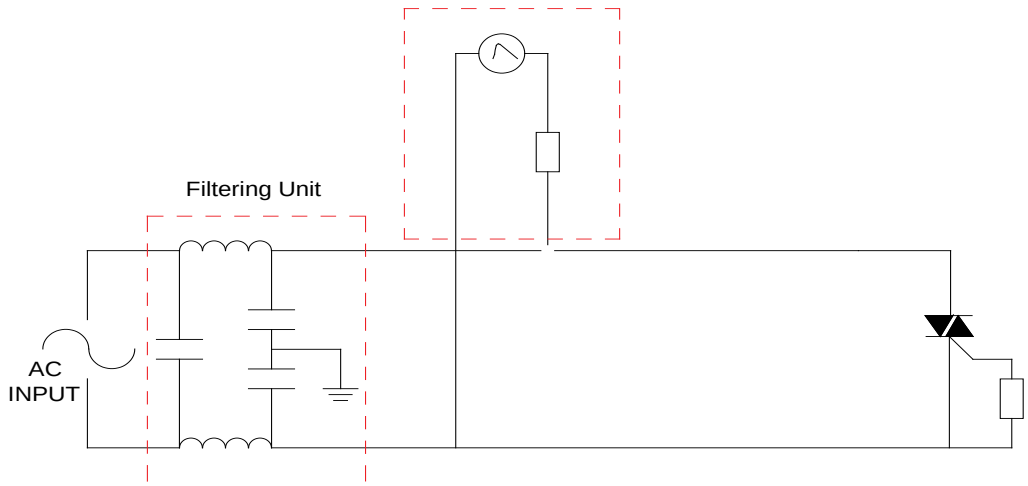

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T3035H-6C	600	35	TO-220C	50	Tube

Document Revision History

Date	Revision	Changes
Apr.10, 2023	A.1.0	Last updated
Oct.15, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

