ELECTRICAL CHARACTERISTICS ($T_j$=25 unless otherwise specified)

| Symbol | Test Condition | Quadrant | Value | | Unit |
|---|---|---|---|---|---|
| $I_{GT}$ | $V_D$=12V $R_L$=33 | - - | MAX. | 5 | mA |
| | | | | 10 | |

97A6


FIG.5: On-state characteris

I

, $I^2t$

$ )V

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

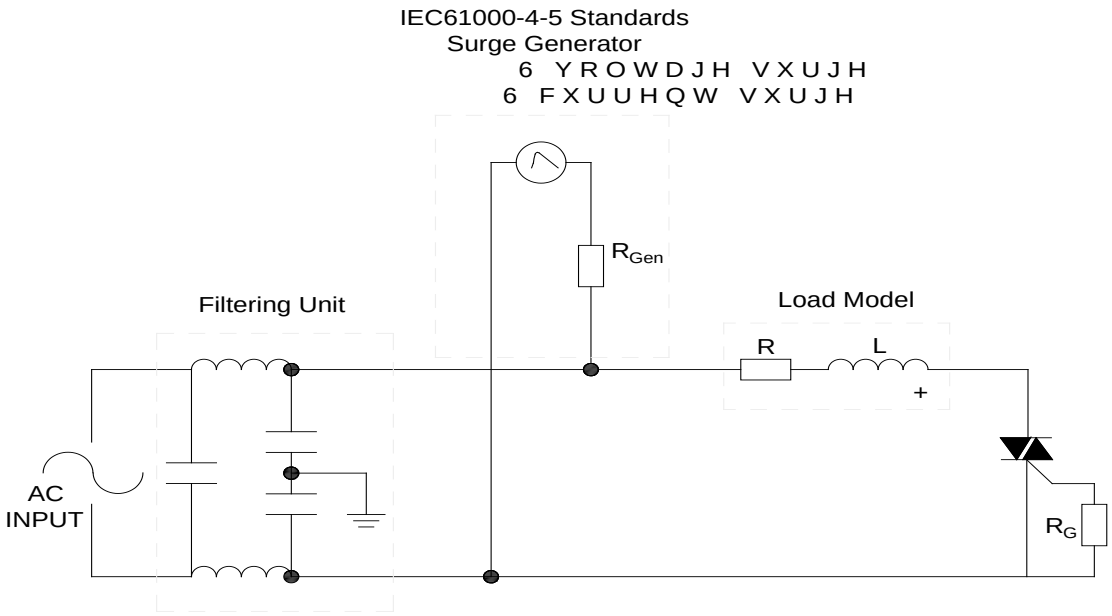

## ORDERING INFORMATION

| Order code | Voltage $V_{DRM}/V_{RRM}$ (V) | IGT(mA) | Package | |
|---|---|---|---|---|
| | | | | |

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences