
ACJP01V-800SW 1A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJP01V-800SW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications



Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.1	W
Peak gate power	P_{GM}	2	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	4.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)


Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33	-	MAX.	10	mA
V_{GT}		-	MAX.	1.3	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3k	-	MIN.	0.15	V
I_L	I_G =1.2I_{GT}		MAX.	25	mA
				10	
I_H	I_T =100mA		MAX.	10	mA
dV/dt	V_D=540V Gate Open T_j =125		MIN.	100	V s
(dI/dt)c	(dV/dt)c=1 9 V j=1225		MIN.	0.6	A/ms
t_{on}	I_G=20mA I_A=200mA I_R=20mA T_j=25		TYP.	2.5	s
t_{off}				25	

FIG.1: Maximum power dissipation versus RMS on-state current

FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

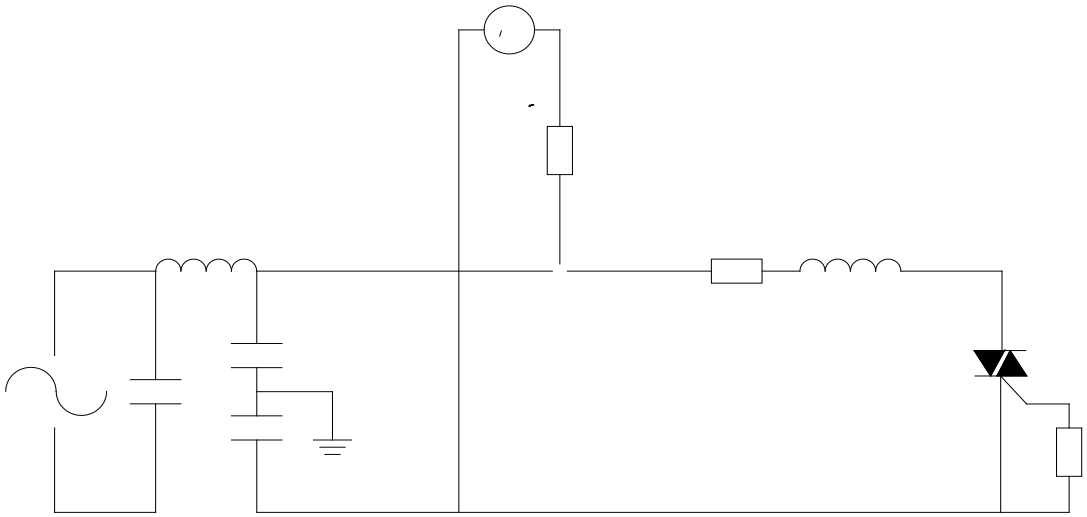


ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJP01V-800SW	800	10	SOT-223	4,000	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.10, 2023	A.1.0	Last updated
Oct.24, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGE MECHANICAL DATA

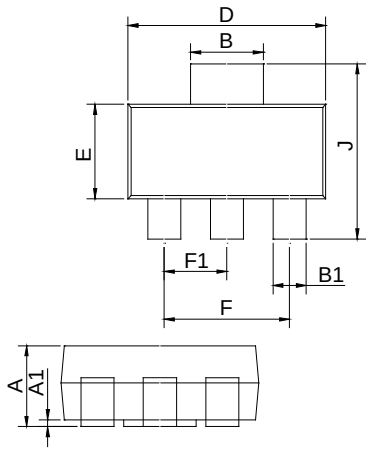

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.50	1.60	1.80	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.90	3.00	3.10	0.114	0.118	0.122
B1	0.60	0.70	0.80	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.30	6.50	6.70	0.248	0.256	0.264
E	3.30	3.50	3.70	0.130	0.138	0.146
F	4.40		4.80	0.173		0.189
F1	2.20		2.40	0.087		0.094
G	0.50		1.00	0.020		0.039
H	1.50	1.75	2.00	0.059	0.069	0.079
J	6.70	7.00	7.30	0.264	0.276	0.287
K	0.80		1.00	0.031		0.039

ACJP01V-800SW JieJie M.04 3(0.004Tc -0.0041 296.385 0 T