
JST08A-600C 8A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST08A-600C triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. By using an internal ceramic pad, JST08A-600C provides a rated insulation voltage of 2500 VRMS, complying with UL standards (File ref: E252906). Package TO-220A is RoHS compliant.

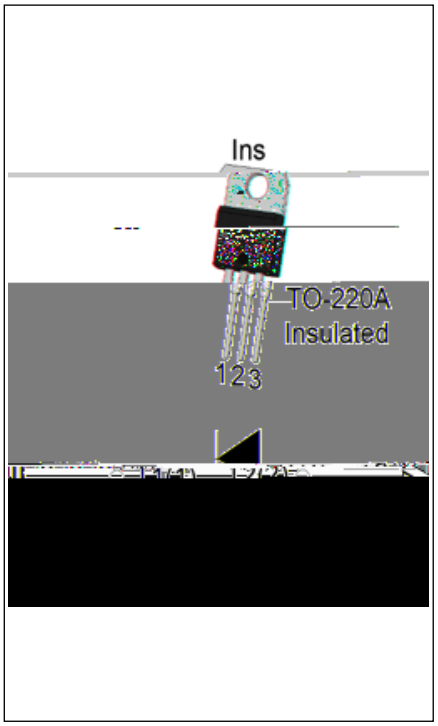

MAIN FEATURES


Symbol	Value	Unit
$I_{T(RMS)}$	8	A
V_{DRM} /V_{RRM}	600	V
I_{GT} / / /	25/25/25/50	mA

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T_{stg}	-40-150	
Operating junction temperature range		T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)		V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)		V_{RRM}	600	V
RMS on-state current ($T_C \leq$ 97)		$I_{T(RMS)}$	8	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)		I_{TSM}	80	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)			88	
I^2t value for fusing (t_p=10ms , T_j=25)		I^2t	32	A^2s
Critical rate of rise of on-state current (I_G=2 I_{GT} , f=100Hz , T_j=125)	-	dI/dt	80	A/μs
	-		40	
Peak gate current (t_p=20μs , T_j=125)		I_{GM}	4	A
Average gate power dissipation (T_j=125)		$P_{G(AV)}$	0.5	W
Peak gate power		P_{GM}	10	W

Peak puXsvAuXem

ORDERING INFORMATION

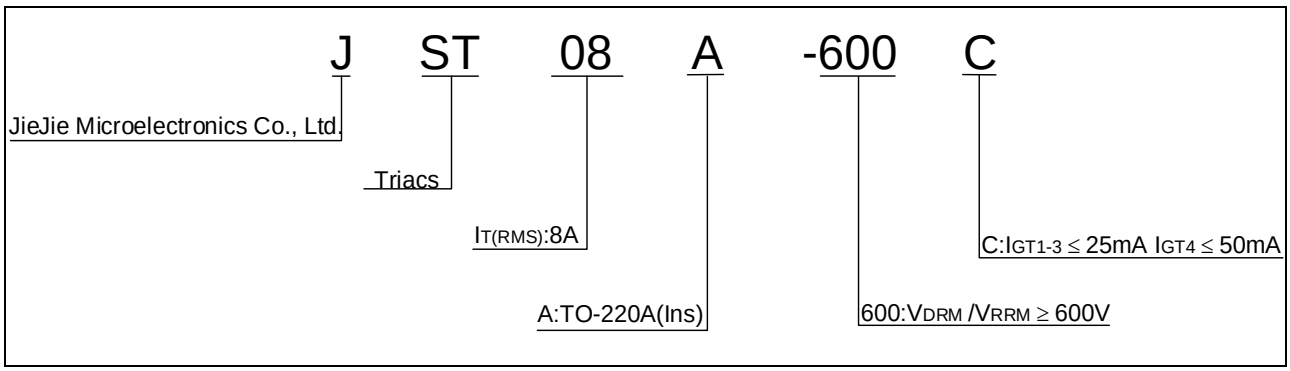

MARKING

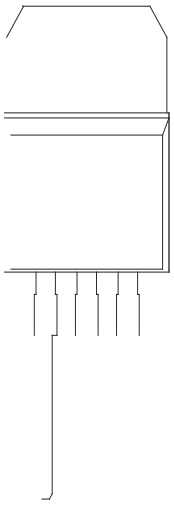


FIG.1: Maximum power dissipation versus RMS on-state current

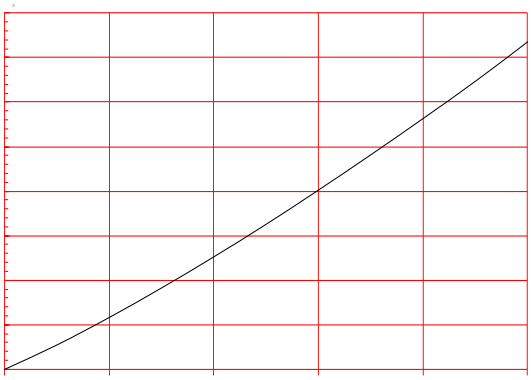


FIG.2: RMS on-state current versus case temperature


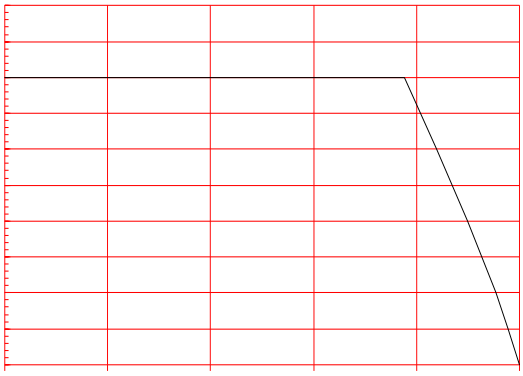


FIG.3: Surge peak on-state current versus number of cycles

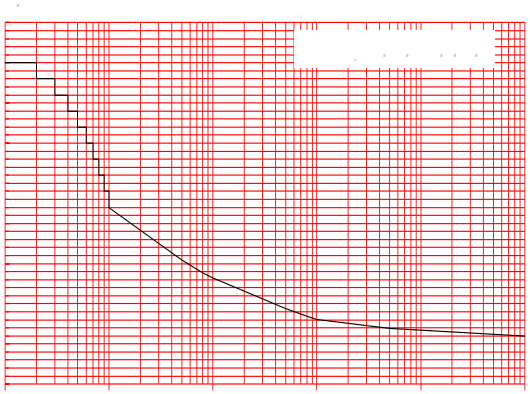

JST08A-600C **JieJie M**