
JST08E-600TW 8A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST08E-600TW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST08E-600TW snubberless triac is especially recommended for use on inductive loads. It can be driven directly through the MCU I/O port. Package TO-263 is RoHS compliant.

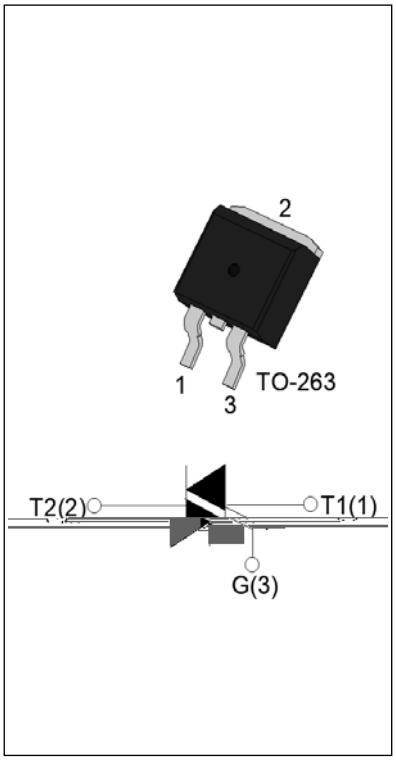

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	8	A
V_{DRM} /V_{RRM}	600	V
I_{GT} / /	5/5/5	mA

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
RMS on-state current ($T_C \leq$ 107)	$I_{T(RMS)}$	8	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	80	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		88	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	32	A^2s
Critical rate of rise of on-state current (I_G=2 × I_{GT} , f=100Hz , T_j=125)	dI/dt	50	A/μs
Peak gate current (t_p=20μs , T_j=125)	I_{GM}	4	A
Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	1.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	5	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3kΩ	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-		═j.44 (=)Tj 0.00262f 49339596.52 72=44 9	

ORDERING INFORMATION

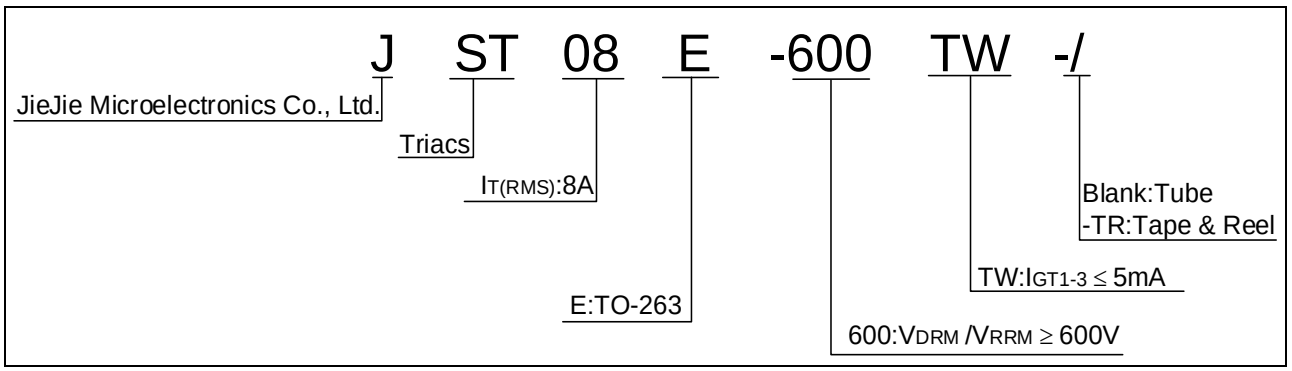

MARKING

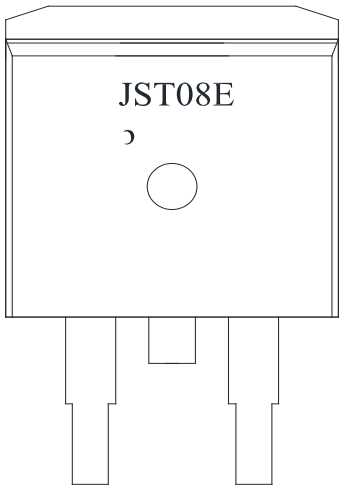


FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

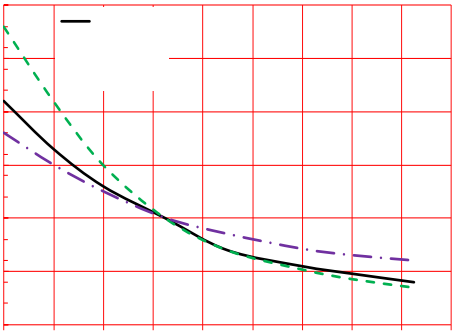



FIG.8 Test circuit for inductive and resistive loads to IEC-

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	


852n4981 ET 0.1.2 730.08 5.16 9 (c)-3.5 24 -0.scn 0 Tc 730.08 5.16 2

PACKAGE MECHANICAL DATA B 1



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50	0.047		0.059
F	0.75		0.85	0.029		0.033

DELIVERY MODE

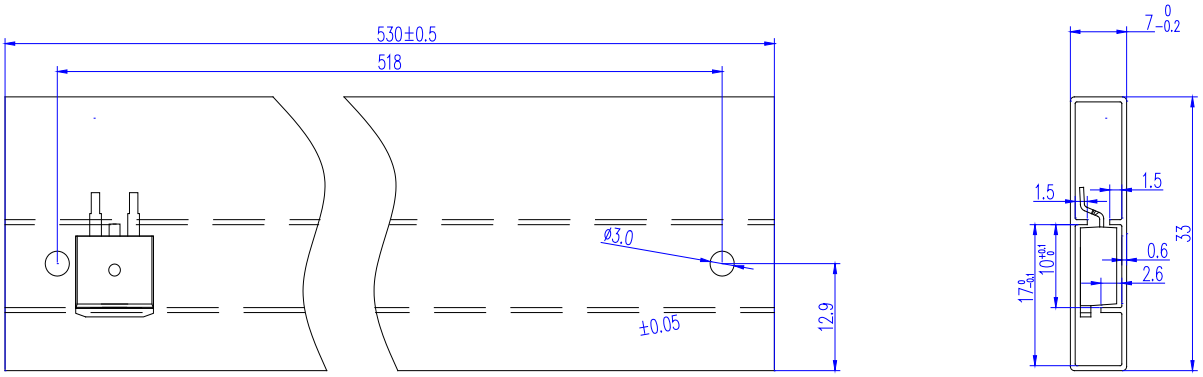

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-263	TUBE	50	1,000	5,000



Ref.	Dimensions					
	Millimeters			Inches		
					Typ.	Max.
W	23.70	24.00	24.30	0.933	0.945	0.957
					0.069	0.073
F	11.40	11.50	11.60	0.449	0.453	0.457
D0	-	1.50	1.60	-	0.059	0.063
D1	-	1.50	1.60	-	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	15.90	16.00	16.10	0.626	0.630	0.634
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	10.80	10.90	11.00	0.425	0.429	0.433
B0	16.20	16.30	16.40	0.638	0.642	0.646
K0	4.80	4.90	5.00	0.189	0.193	0.197
t	0.35	0.40	0.45	0.014	0.016	0.018