JST134QP-800E 4A TRIAC

Rev.A.1.0

DESCRIPTION:

The JST134QP-800E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. From T2 terminals to external heatsink. Package SOT-82 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T_{stg}	-40-150	
Operating junction temperature range		T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)		V_{DRM}	800	V
Repetitive peak reverse voltage (T_j=25)		V_{RRM}	800	V
RMS on-state current (T_C 84)		$I_{T(RMS)}$	4	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)		I_{TSM}	25	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)			27.5	
I^2t value for fusing (t_p=10ms , T_j=25)		I^2t	3.125	A^2s
Critical rate of rise of on-state current (I_G=2 × I_{GT} , f=100Hz , T_j=125)	- -	dI/dt	80	A s
			50	
Peak gate current (t_p=20 s , T_j=125)		I_{GM}	2	A
Average gate power dissipation (T_j=125)		$P_{G(AV)}$	0.5	W
Peak gate power		P_{GM}	5	W

pp

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33	- -	MAX.	10	mA
				25	
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3k	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	15	mA
				25	
I_H	I_T=100mA		MAX.	20	mA
dV/dt	V_D=540V Gate Open T_j=110		MIN.	250	V s
(dV/dt)c	(dI/dt)c=1.8A/ms, T_j=110		MIN.	6	
t_{on}	I_G=40mA I_A=200mA I_R=20mA T_j=25		TYP.	3	s
t_{off}				30	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=5A t_p=380 s	T_j=25	1.55	V
V_{TO}	Threshold voltage	T_j=125	0.92	V
R_D	Dynamic resistance	T_j=125	107	
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	A
I_{RRM}		T_j=125	0.35	mA

THERMAL RESISTANCES

	Value	Unit

ORDERING INFORMATION


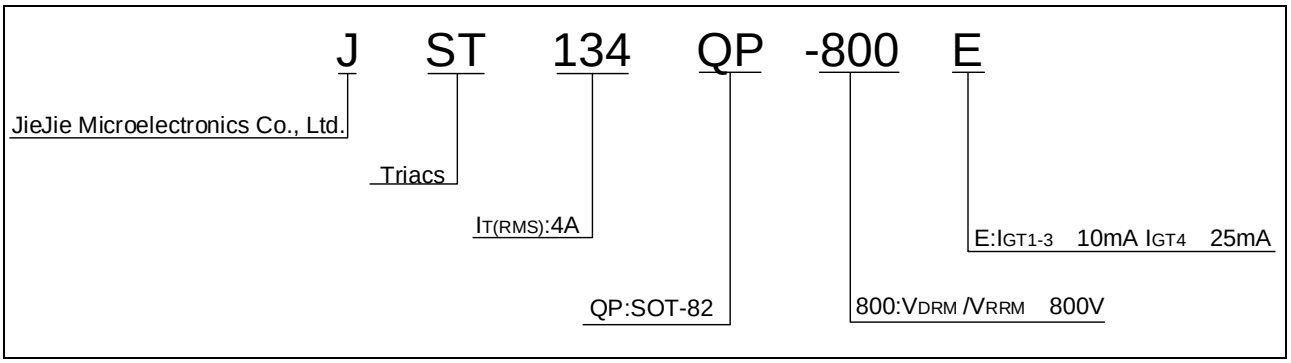


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



PACKAGE MECHANICAL DATA