
The JST137F-600D triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. By using an external plastic package, JST137F-600D provides a rated insulation voltage of 2000 VRMS, complying with UL standards (File ref: E252906). Package TO-220F is RoHS compliant.

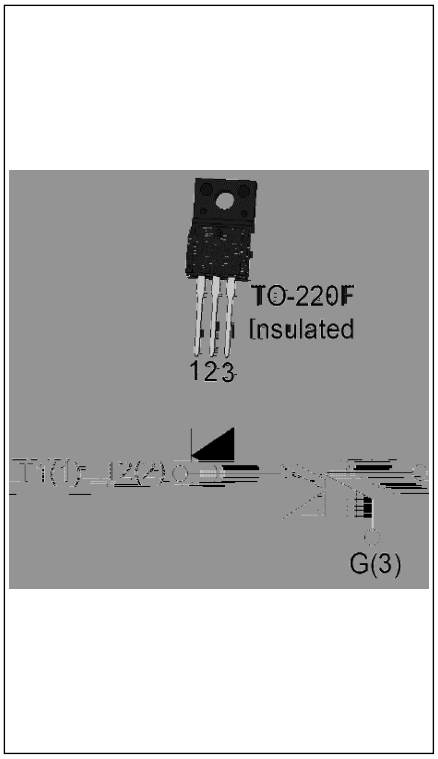

MAIN CHARACTERISTICS

Symbol	Value	Unit
$I_{T(RMS)}$	8	A
V_{DRM}/V_{RRM}	600	V
I_{GT} / / /	5/5/5/10	mA

ABSOLUTE MAXIMUM RATINGS

Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
RMS on-state current (T_C 074)	$I_{T(RMS)}$	8	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	65	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		72	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	21	A^2s
Critical rate of rise of on-state current (I_G=2 I_{GT} , f=100Hz , T_j=125) - -	dI/dt	50	A/µs
		20	
Peak gate current (t_p=20µs , T_j=125)	I_{GM}	4	A
Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	4	kV

9 [9/ ¢ wL/ ! [/I ! w ! / ¢ 9w(Tj=25 ¢ L/ unless otherwise specified)

I_{GT}	V_D=12V R_L=33Ω	- -	MAX.	5	mA
				10	
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3kΩ	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	15	mA
				20	
I_H	I_T=500mA		MAX.	10	mA
dV/dt	V_D=400V Gate Open T_j=125		MIN.	80	V/μs
(dV/dt)c	(dI/dt)c=2.7A/ms, T_j=125		MIN.	2	V/μs
t_{on}	I_G=20mA I_A=200mA I_R=20mA T_j=25		TYP.	1.2	μs
t_{off}				15	


{ ¢ ! ¢ L/ /I ! w ! / ¢ 9wL { ¢ L/ {

V_{TM}	I_{TM}=10A t_p=380μs	T_j=25	1.5	V
V_{TO}	Threshold voltage	T_j=125	0.8	V
R_D	Dynamic resistance	T_j=125	53	mΩ
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	μA
I_{RRM}		T_j=125	0.35	mA


¢ I9wa ! [w9 { L { ¢ ! b/9 {

$R_{th(j-c)}$	junction to case (AC)	4.5	/W
$R_{th(j-a)}$	junction to ambient (AC)	60	/W

hw59wL b D L b Chwa ! ¢ L h b

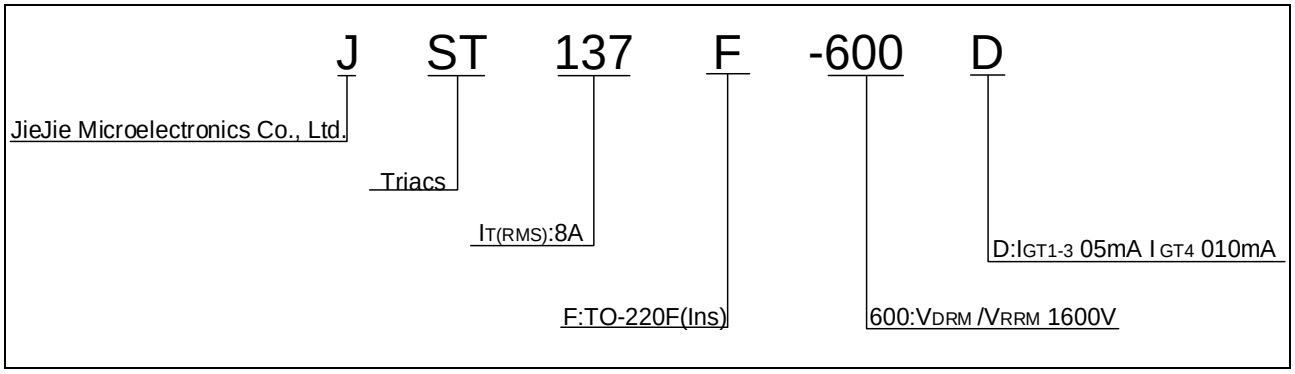

a ! wYLbD

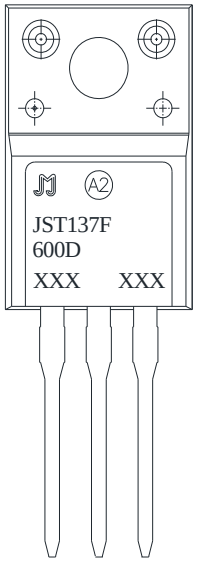





FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards standards



h R 5 ERING IN C h RMATI h N

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated
Sept.11, 2025	A.1.1	Revise dI/dt
Oct.15, 2025	A.1.2	Revise PACKAGE MECHANICAL DATA

t!/Y!D9 a9/I!bL/![5!¢!

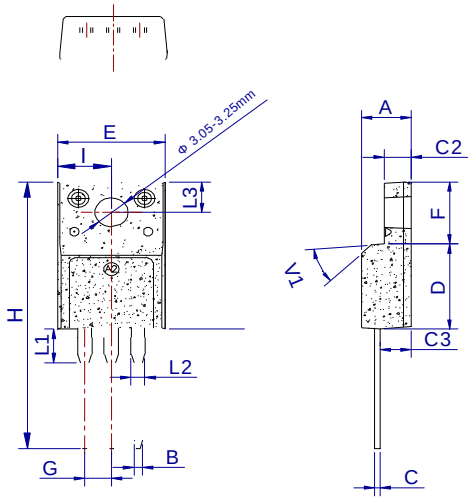

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G	2.40		2.70	0.094		0.106
H	28.0		29.8	1.102		1.173
I						
J						
K						
L1	3.20		3.80	0.126		0.150
L2	1.14		1.70	0.045		0.067
L3	3.20		3.60	0.126		0.142
M						
V1		45°			45°	

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.
Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.
is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.
Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.