
JST139D-600D 16A TRIAC

Rev.A.1.0

DESCRIPTION:

The JST139D-600D triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. From T2 terminals to external heatsink. Package TO-262 is RoHS compliant.

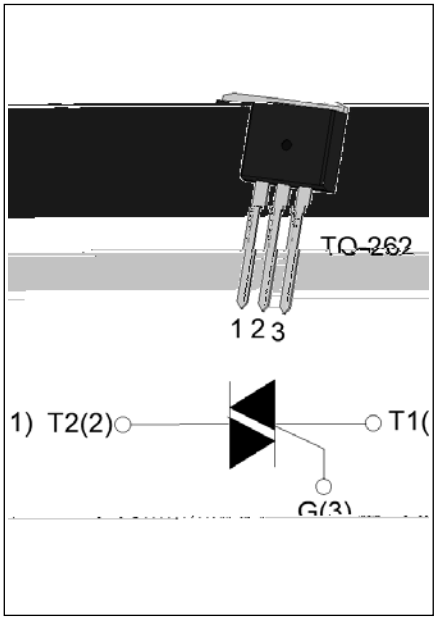

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	16	A
V_{DRM} /V_{RRM}	600	V
I_{GT} / / /	5/5/5/10	mA

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T_{stg}	-40-150	
Operating junction temperature range		T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)		V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)		V_{RRM}	600	V
RMS on-state current ($T_C \leq$ 95)		$I_{T(RMS)}$	16	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)		I_{TSM}	140	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)			154	
I^2t value for fusing (t_p=10ms , T_j=25)		I^2t	98	A^2s
Critical rate of rise of on-state current (I_G=2× I_{GT} , f=100Hz , T_j=125)	-	dI/dt	50	A/μs
	-		20	
Peak gate current (t_p=20μs , T_j=125)		I_{GM}	4	A
Average gate power dissipation (T_j=125)		$P_{G(AV)}$	0.5	W
Peak gate power		P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)		V_{pp}	4.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33Ω	- -	MAX.	5	mA
				10	
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3kΩ	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	15	mA
				20	
I_H	I_T=500mA		MAX.	10	mA
dV/dt	V_D=400V Gate Open T_j=125		MIN.	50	V/μs
(dV/dt)c	(dI/dt)c=7.2A/ms, T_j=110		MIN.	2	V/μs
t_{on}	I_G=20mA I_A=200mA I_R=20mA T_j=25		TYP.	3	μs
t_{off}				50	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=15A t_p=380μs	T_j=25	1.5	V
V_{TO}	Threshold voltage	T_j=125	0.75	V
R_D	Dynamic resistance	T_j=125	27	mΩ
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	μA
I_{RRM}		T_j=125	0.4	mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	1.3	/W
$R_{th(j-a)}$	junction to ambient (AC)	60	/W

ORDERING INFORMATION

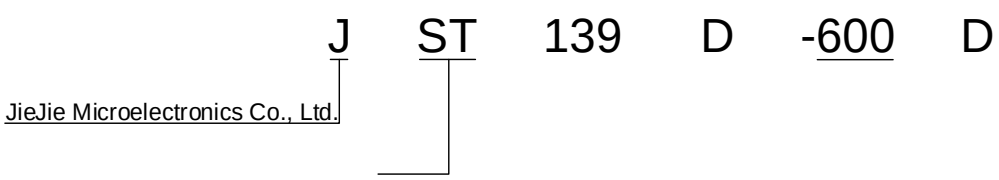


FIG.1: Maximum power dissipation versus RMS on-state current

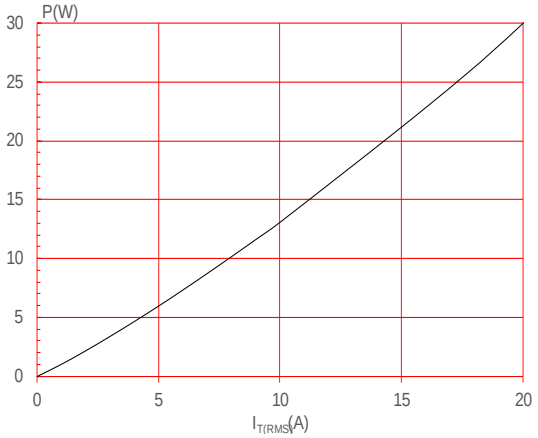


FIG.2: RMS on-state current versus case temperature

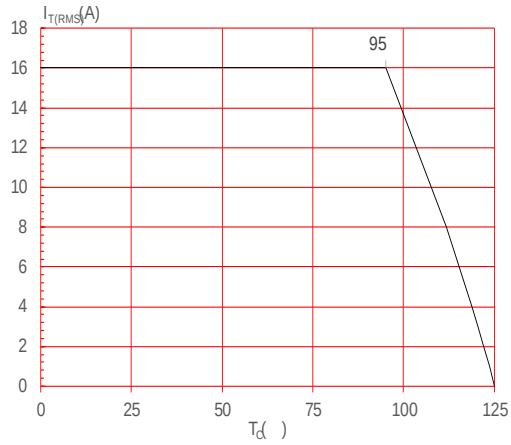


FIG.3: Surge peak on-state current versus number of cycles

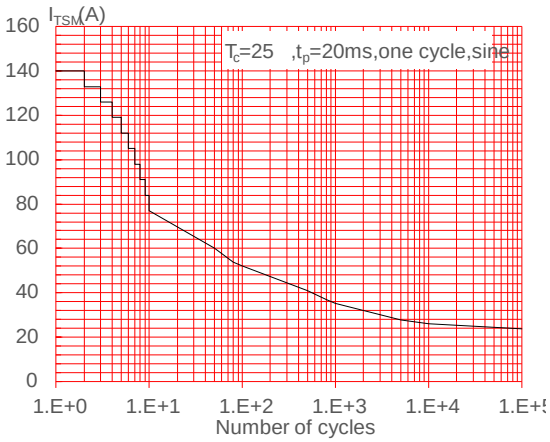


FIG.4: On-state characteristics


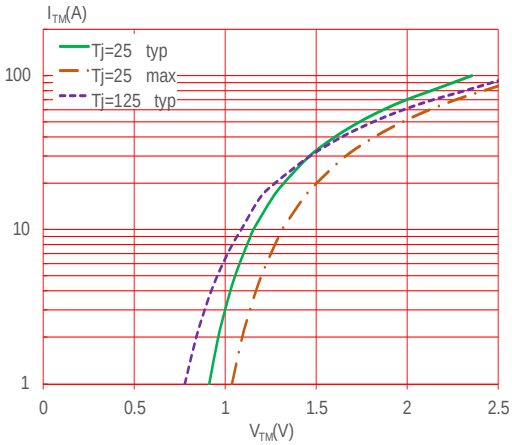


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width t_p<20ms, and corresponding value of I^2t

(- : dI/dt<50A/μs; - : dI/dt<20A/μs)

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards AC

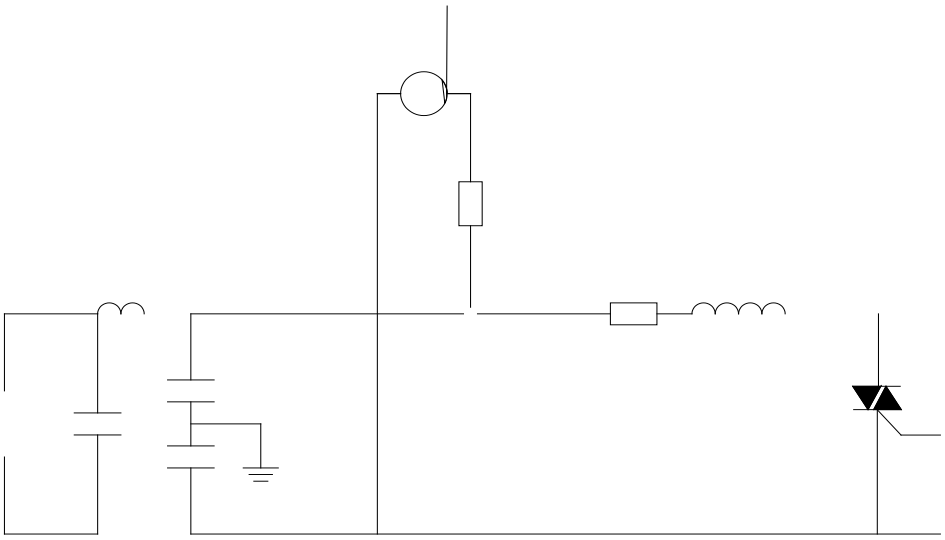


ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		-	-			
JST139D-600D	600	5	10	TO-262	50	Tube

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated

PACKAGE MECHANICAL DATA

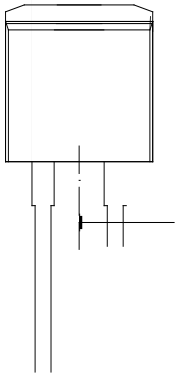

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.95		10.20	0.392		0.402
B	23.85		24.05	0.939		0.947
C	9.40		9.60	0.370		0.378
D	4.95		5.25	0.195		0.207
E	1.35		1.40	0.053		0.055
F	0.80		0.85	0.031		0.033
G						
H	4.45		4.55	0.175		0.179
J	2.20		2.60	0.087		0.102
K	0.48		0.52	0.019		0.020