DESCRIPTION:

The JST16C-, 600CW triac is suitable for general purpose AC
function in applications

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol,	Value,	Unit

Peak pulse voltage
(T_j=25 ; non-

ORDERING INFORMATION

J ST 16 6

FIG.1: Maximum power dissipation versus RMS on-state current


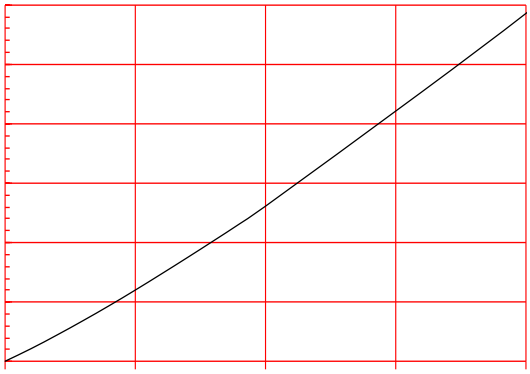


FIG.2: RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

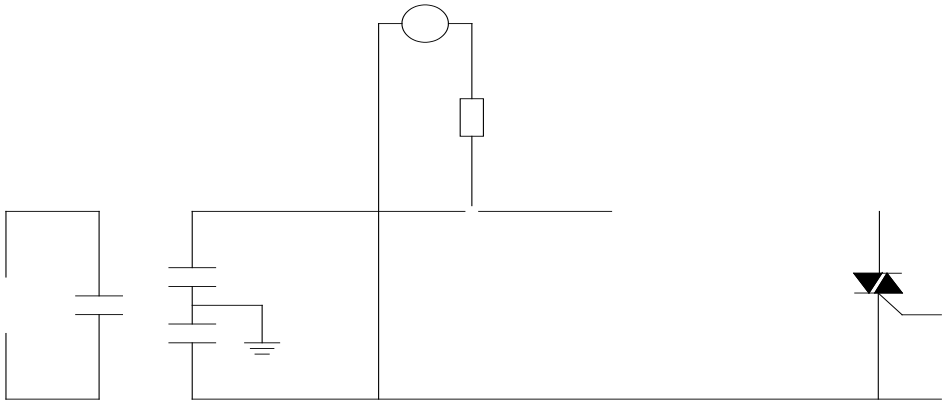

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode

PACKAGE MECHANICAL DATA

