
T0610H-8E 6A TRIAC

Rev.A.1.0

DESCRIPTION:

The T0610H-8E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T0610H-8E provides a very high switching capability up to junction temperatures of 150°C. It can be driven directly through the MCU I/O port. Package TO-263 is RoHS compliant.




MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	6	A
V_{DRM} /V_{RRM}	800	V
I_{GT} / /	10/10/10	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-150	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	800	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	800	V
RMS on-state current (T_C 0132)	$I_{T(RMS)}$	6	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	60	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		66	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	18	A^2s
Critical rate of rise of on-state current (I_G=2× I_{GT} , f=100Hz , T_j=150)	dI/dt	50	A s
Peak gate current (t_p=20 s , T_j=150)	I_{GM}	4	A
Average gate power dissipation (T_j=150)	$P_{G(AV)}$	1	W

ORDERING INFORMATION

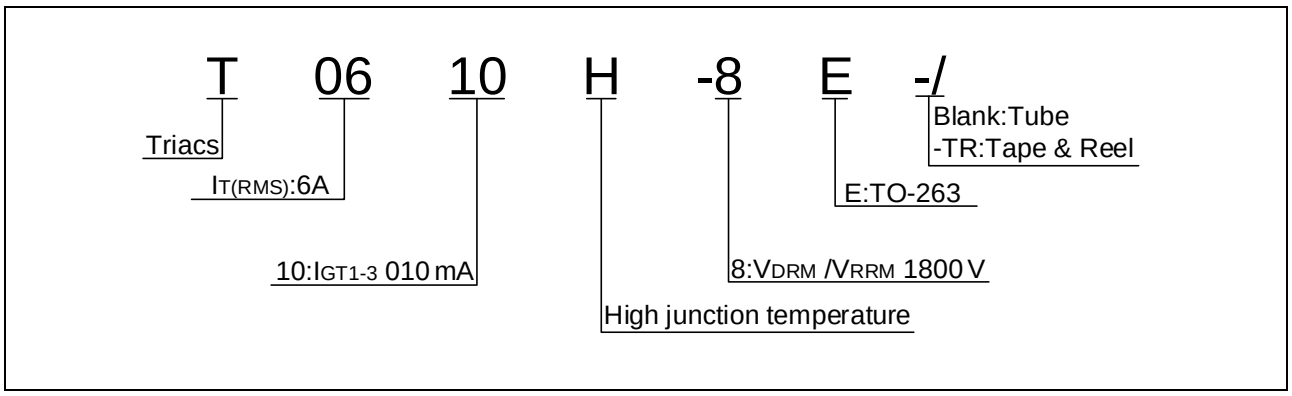

MARKING

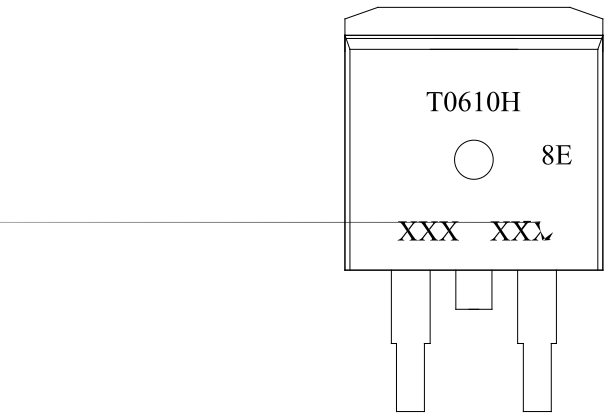



FIG.1 Maximum power dissipation versus RMS on-state current

FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

d€q4W‘ YP6 9 €¡

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

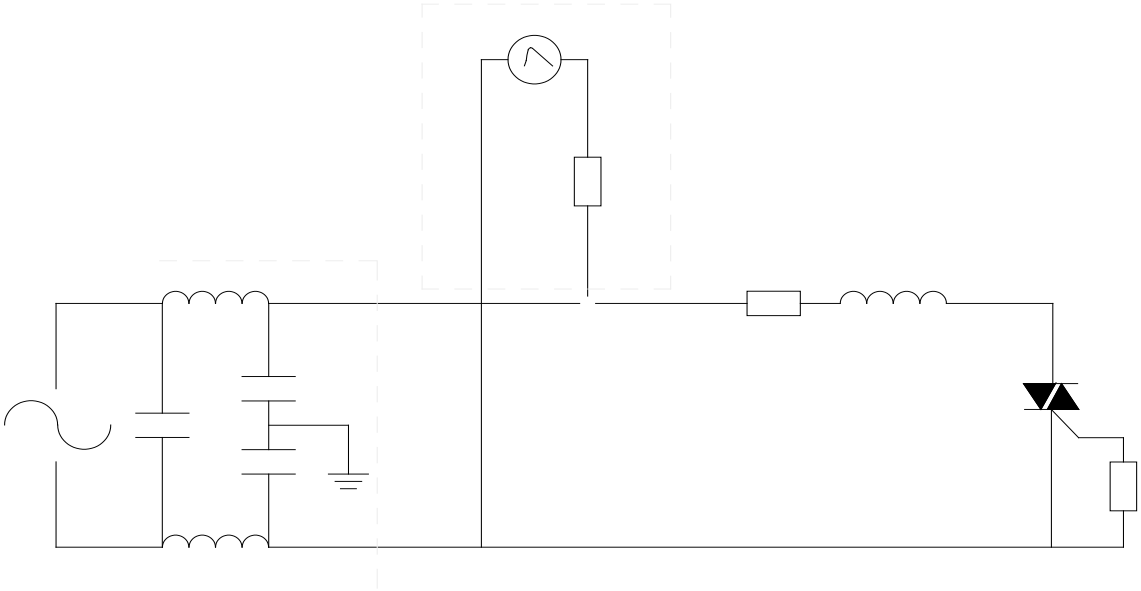


ORDERING INFORMTON

Order coe	Voltage V_{DRM}/V_{RRM} (V)	IGT(m)	Packag	Base qty.	mode
		- -			
T0610H-8E-TR				800	Tape Reel

Document Revision History

Date	Revision	Changes
Apr. 3	A.1.0	Last upd

DELIVERY MODE

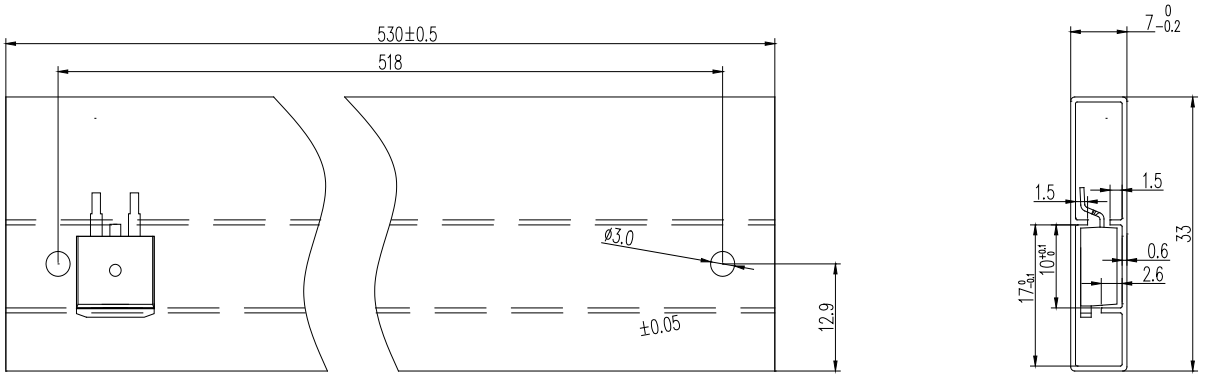

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-263				

R Tm 6 (E-8.6 (UBE)]TJ 0 T9 0 Td ( )Tj E-0.001 Tw4MCID 10 >>-)Tj 0.001 Tc -0.9.354 1.65950Td (26

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences