# T2035H-6E 20A TRIAC



D 1

| | | | |
|---|---|---|---|
| Peak pulse voltage<br>($T_j$=25 ; non-repetitive,off-state;FIG.8) | $V_{pp}$ | 4 | kV |

**ELECTRICAL CHARACTERISTICS** )kV

**FIG.1** Maximum power dissipation versus RMS on-state current

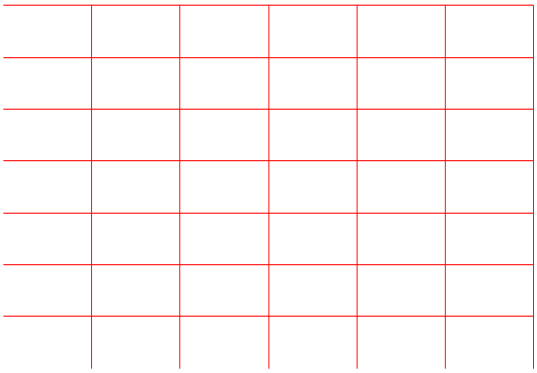



**FIG.2:** RMS on-state current versus case temperature

# T2035H-6E

FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



## DELIVERY MODE

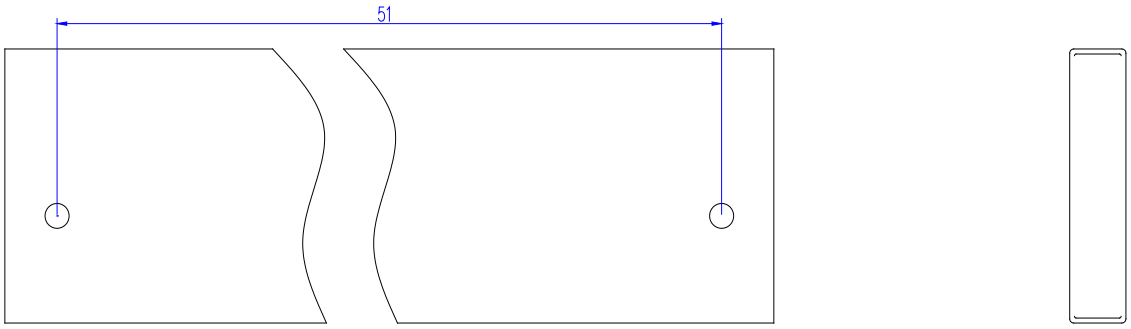

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences