FIG 1: Forward characteristics(per diode)

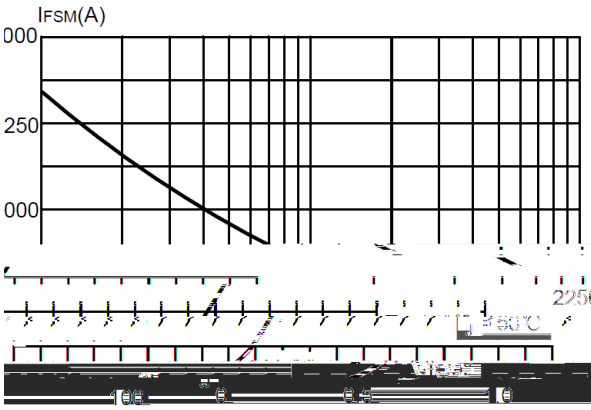


FIG 2: Peak on-state surge current

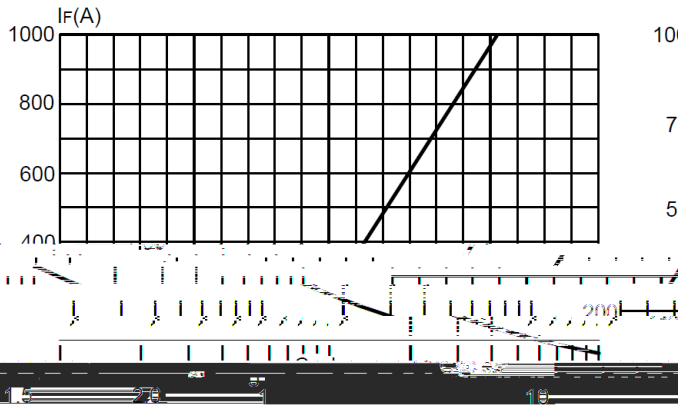


FIG 3: Typical transient thermal impedance junction to case(per diode)




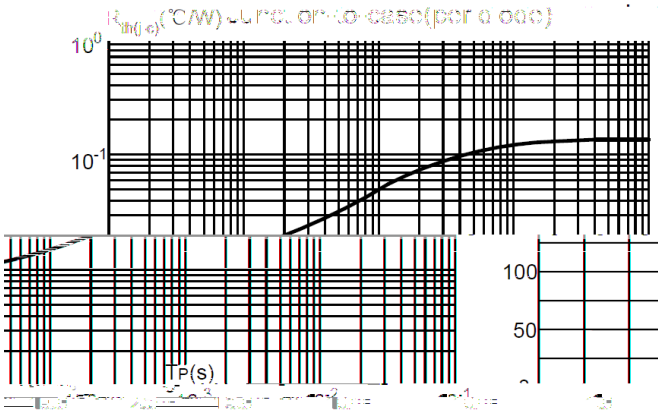


FIG 4: Maximum average forward current

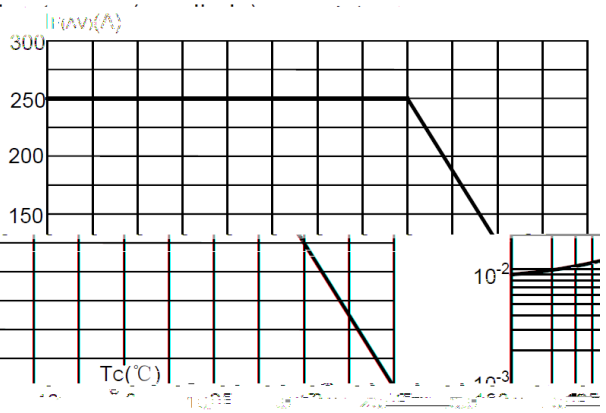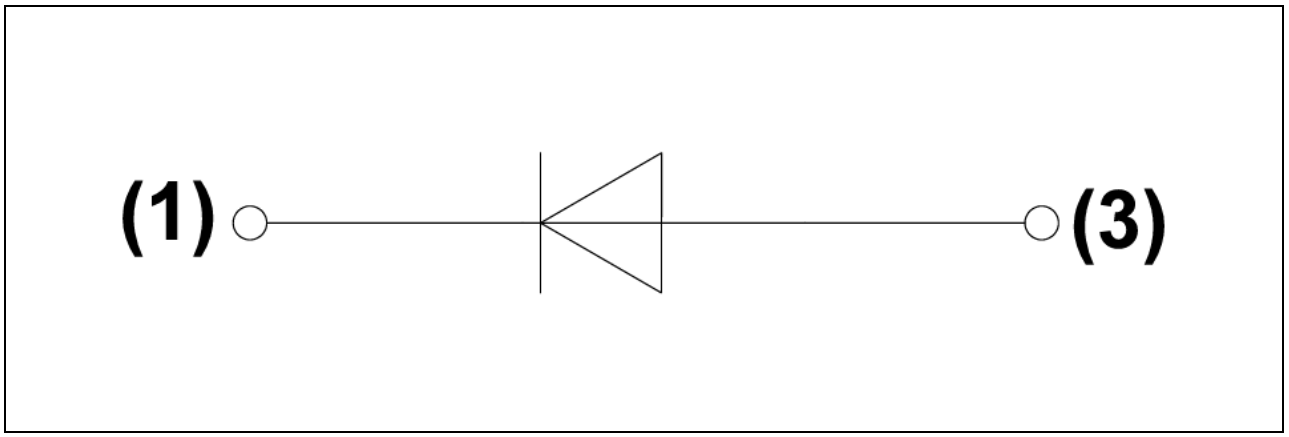

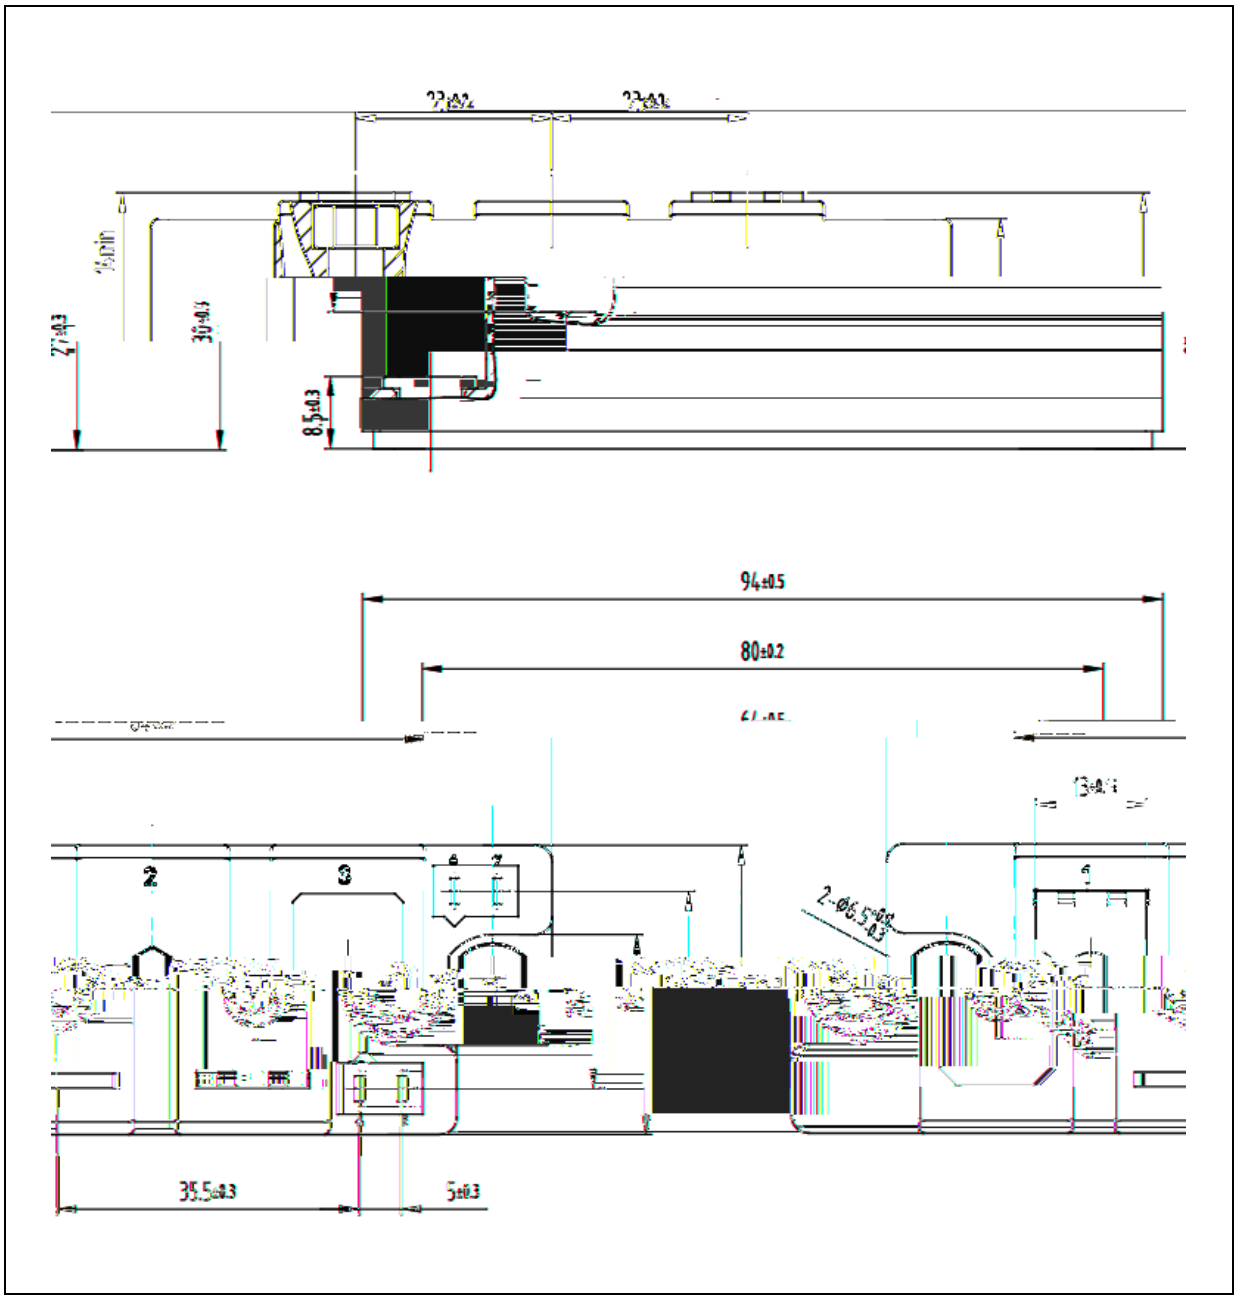


94±0.5
80±0.2
2
3
35.5±0.3
5±0.3