

					Ω

FIG 1: Forward characteristics(per diode)

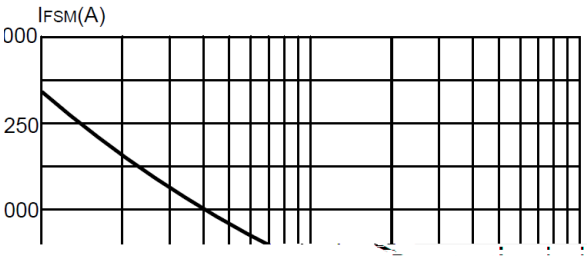


FIG 2: Peak on-state surge current

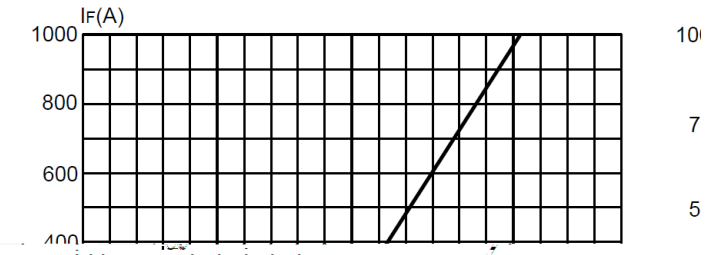


FIG 3: VF max. temperature

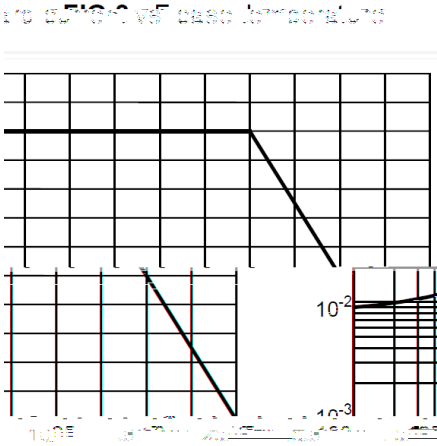


FIG 4: Maximum transient thermal impedance junction to case(per a body)

