
FIG.1: Forward characteristics(per diode)


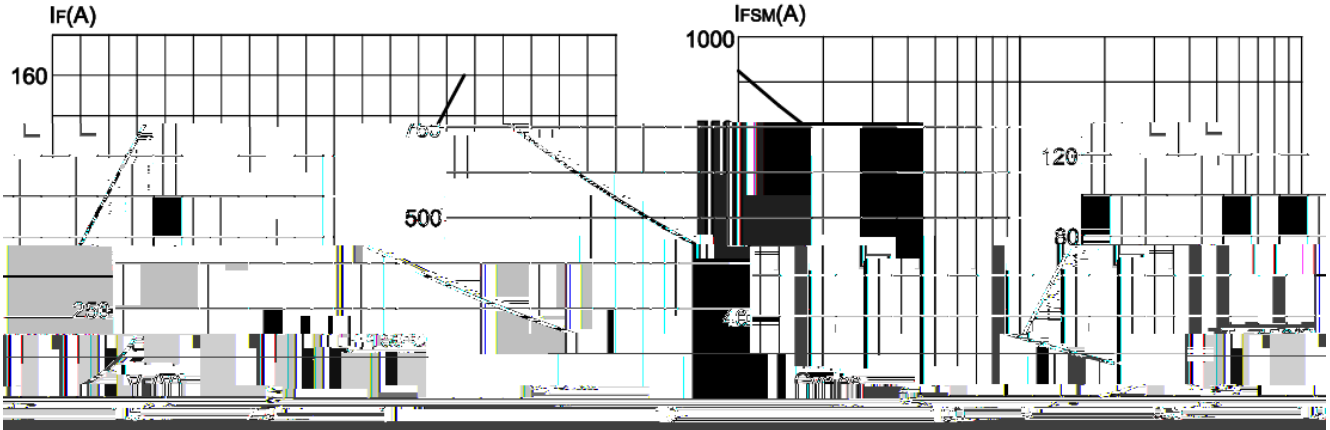



FIG.2: Peak on-state surge current


vs. case temperature

FIG.4: Maximum transient thermal impedance

FIG.3: Forward current

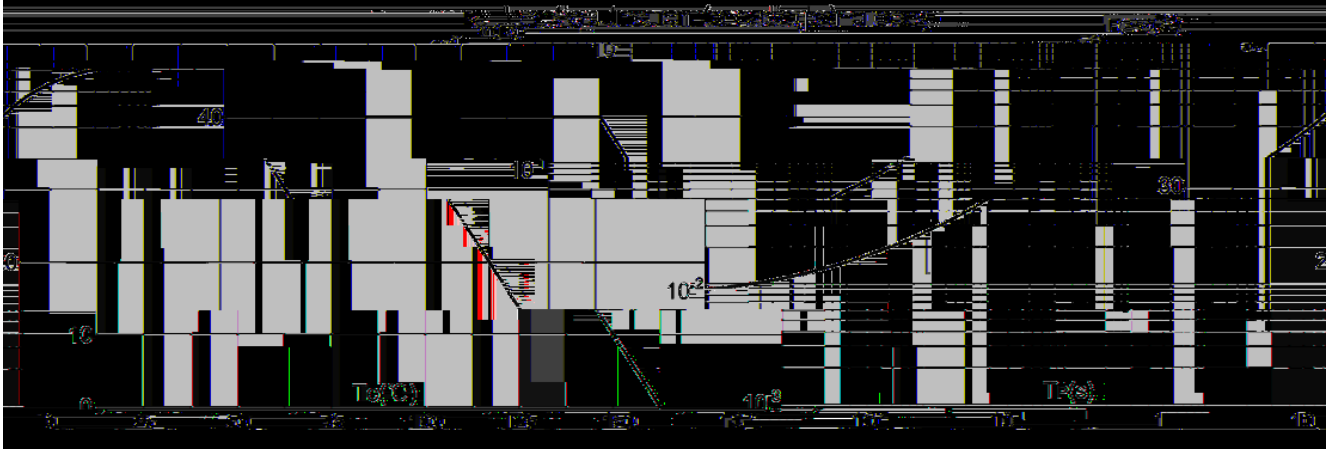

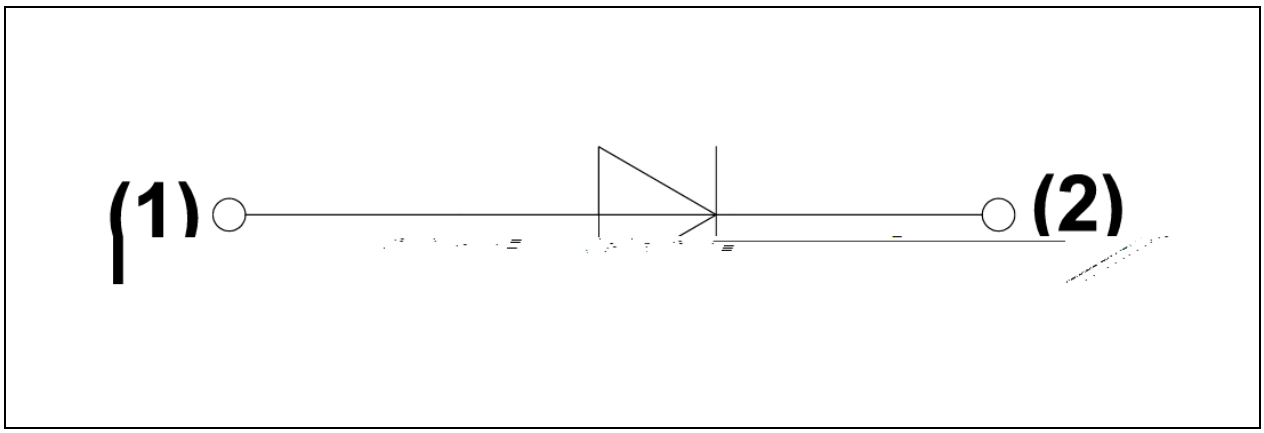

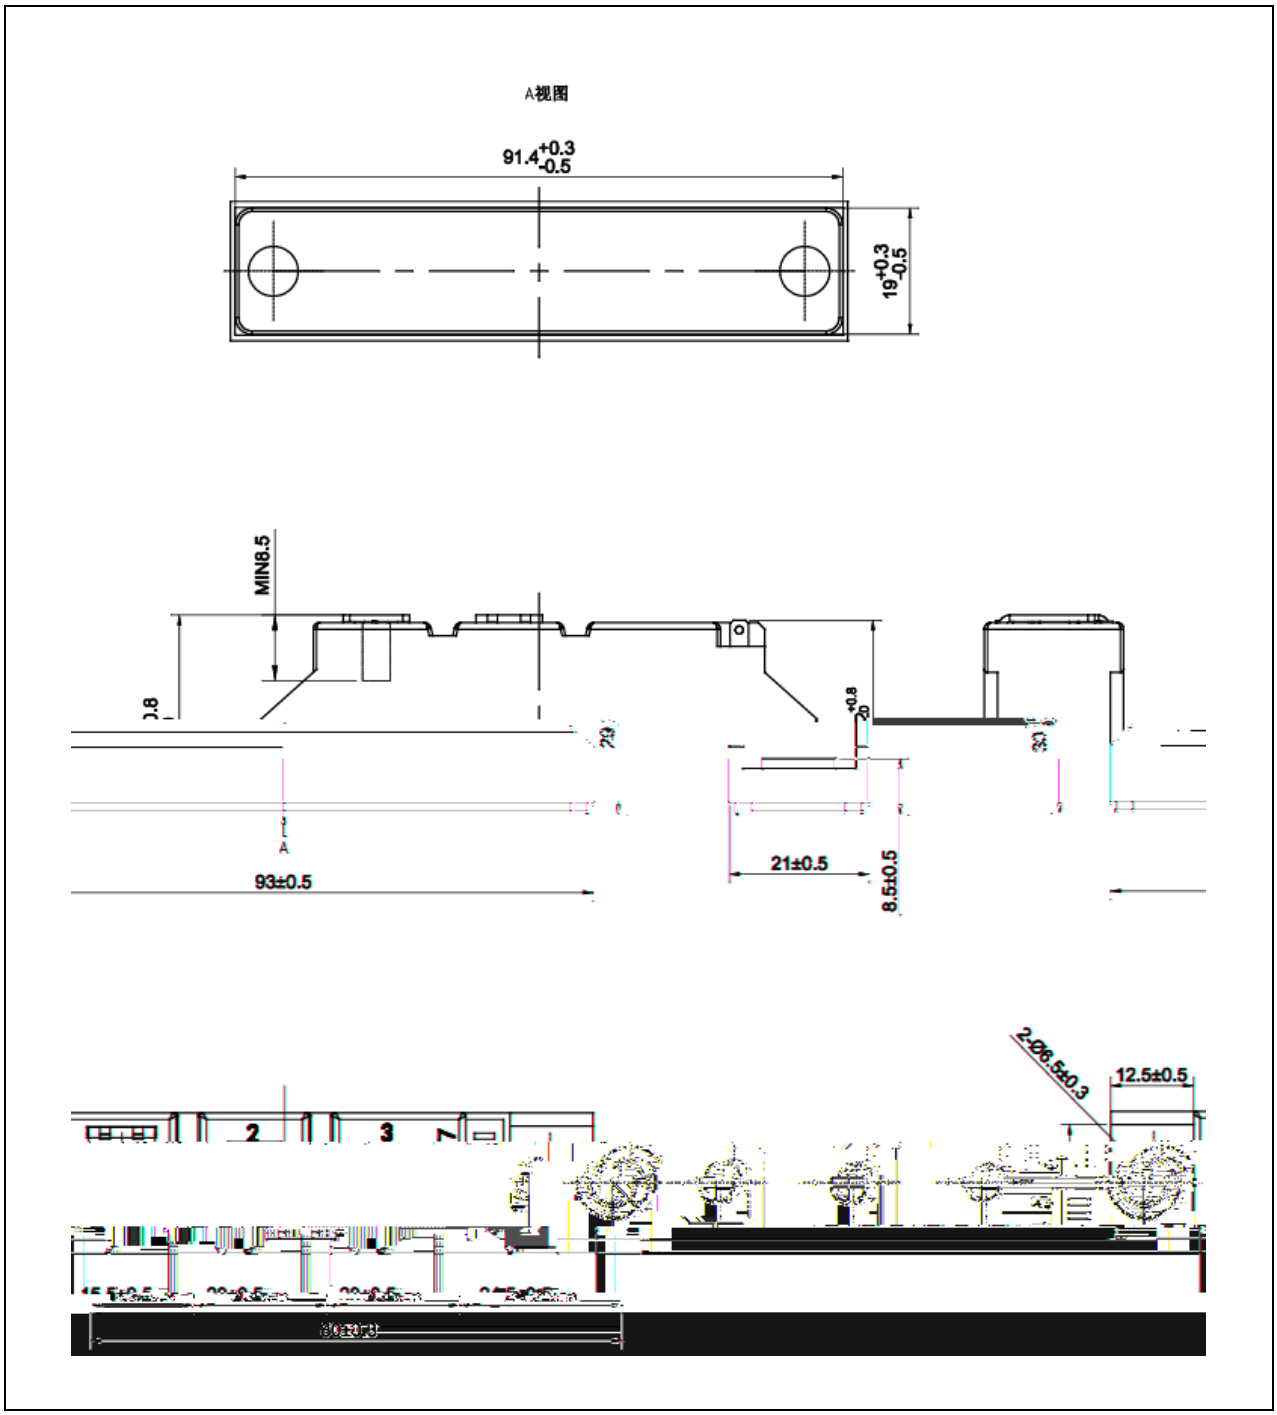
A视图
91.4+0.3 -0.5
19+0.3 -0.5
MIN8.5
93±0.5
21±0.5
8.5±0.5
12.5±0.5