
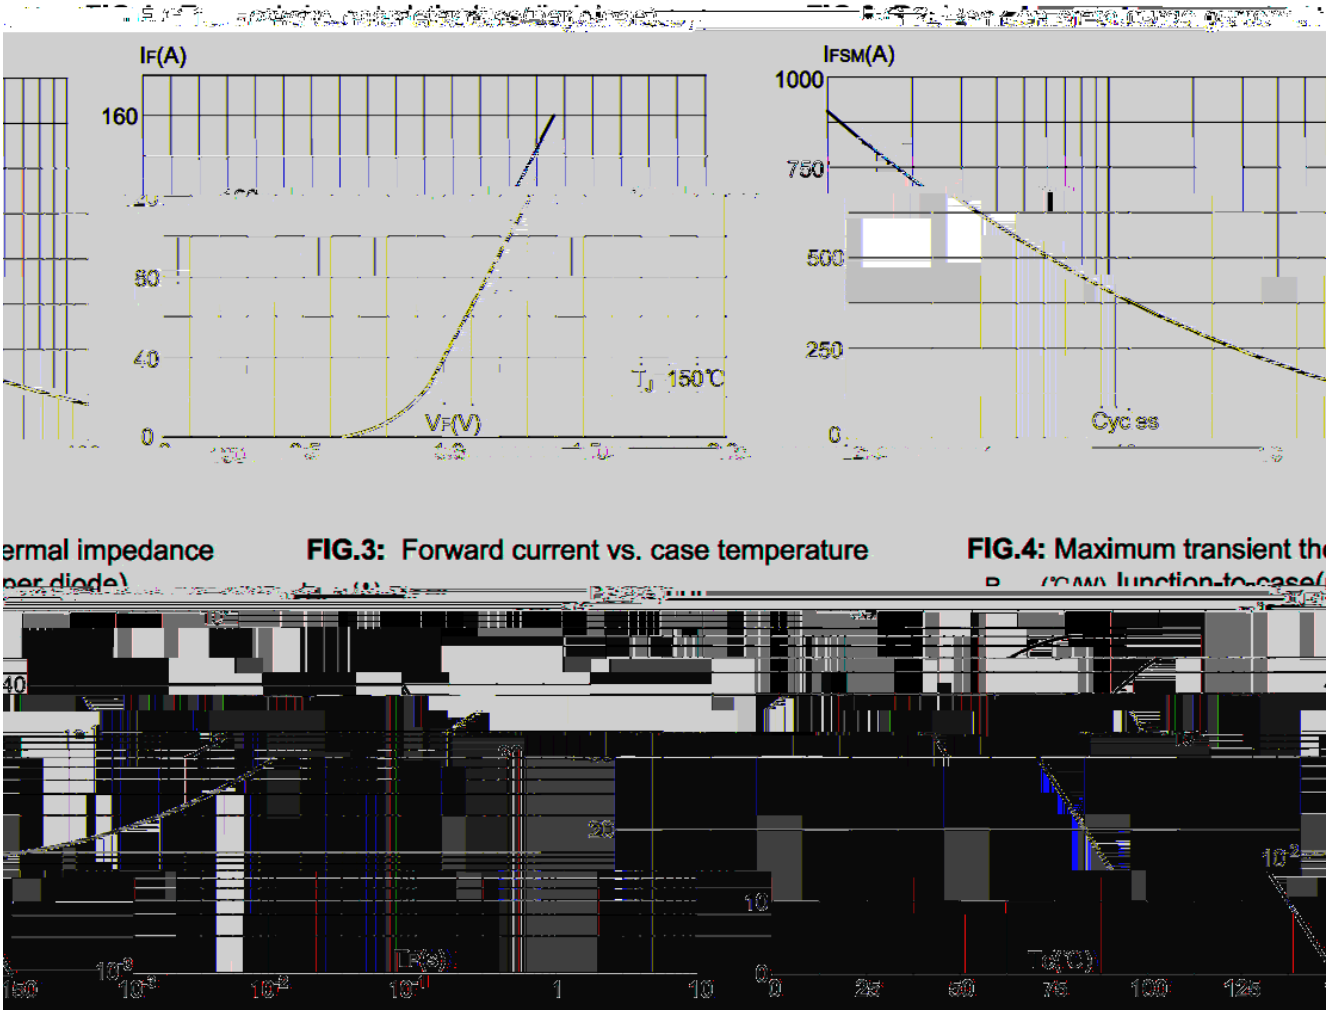



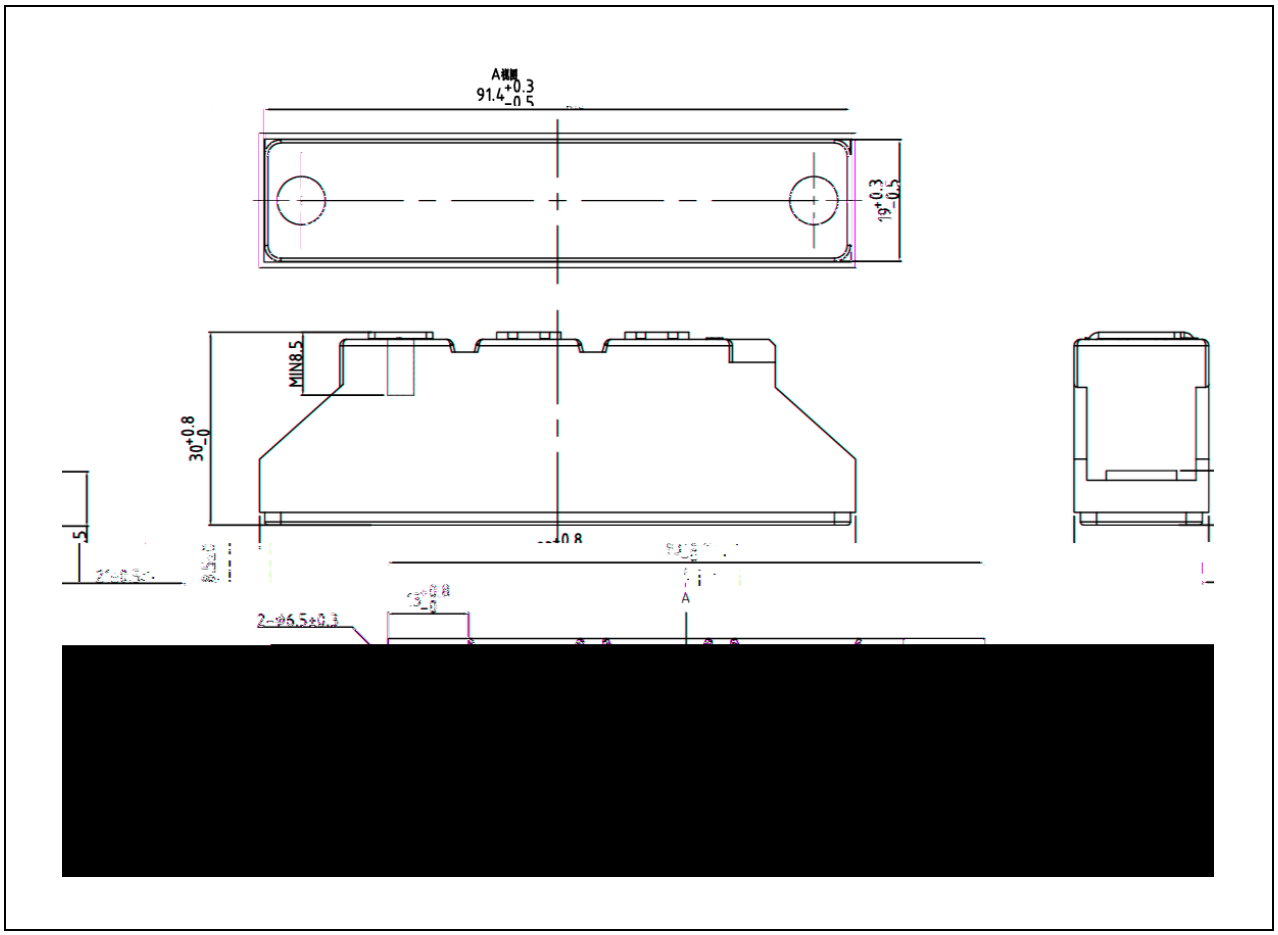
ermal impedance per diode)

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient th

Junction-to-case(

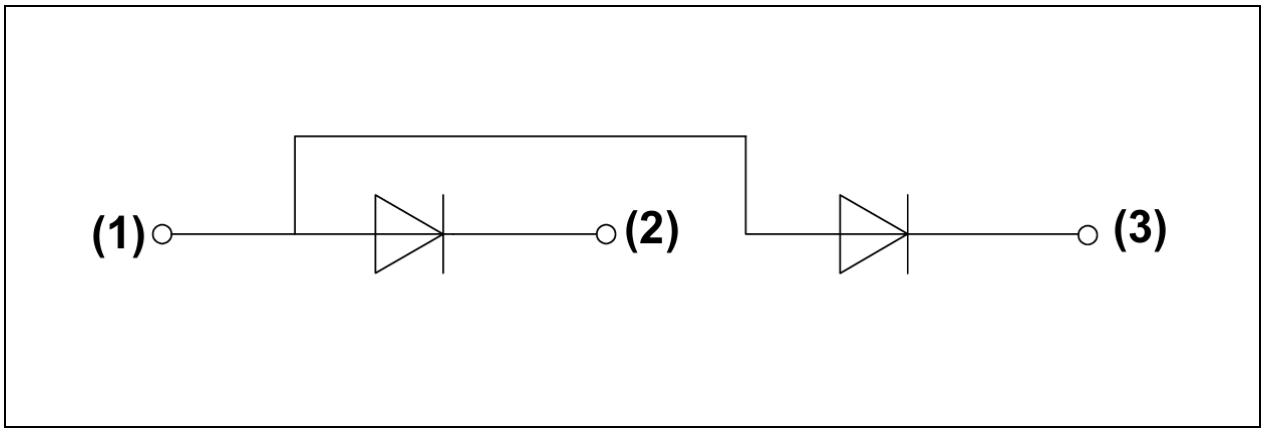


A视图
91.4+0.3 -0.5
19+0.3 -0.5
MIN8.5
30+0.8 -0
A