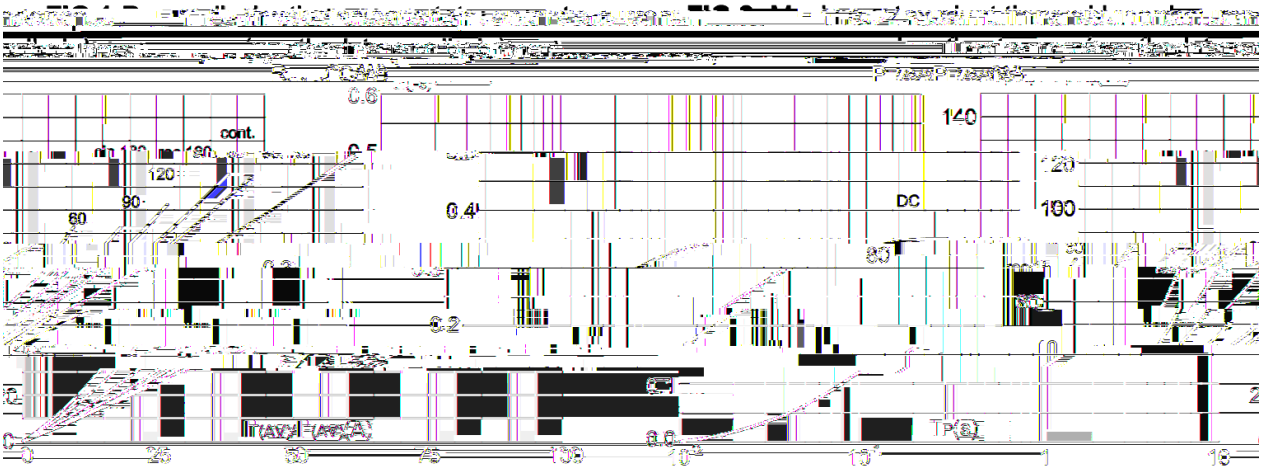




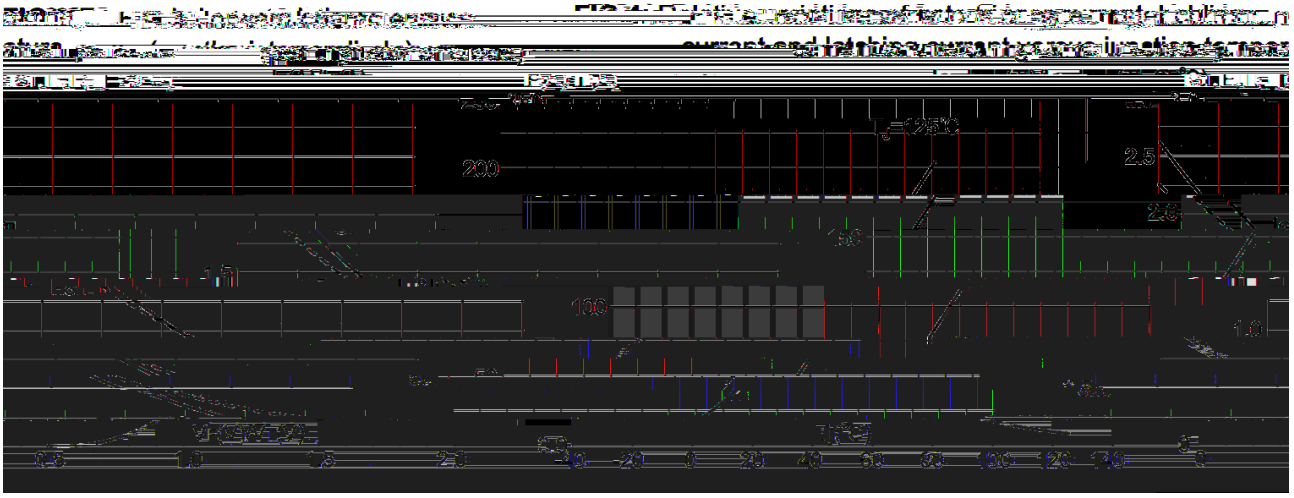


FIG.5 Gate trigger characteristics

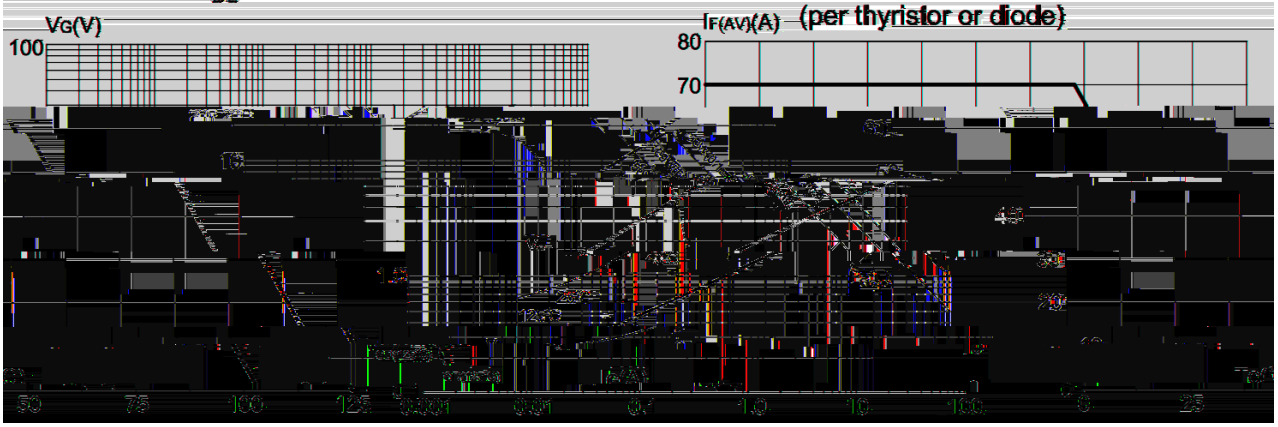


FIG.6: Forward current vs. case temperature (per thyristor or diode)